

Released on Nov 14, 2019

Please contact your local distributor for further information.

Amtec Techniquip PTY LTD
20 Hughes Industrial Park
Cnr Romeo & Oscar Street
Boksburg, Gauteng
South Africa
www.amtectechniquip.co.za
Tel: 011 823 2678



Product Catalogue

- ✚ Spectrum Analyzers
- ✚ Digital Storage Oscilloscopes
- ✚ Arbitrary Waveform Generators
- ✚ Programmable DC Power Supplies
- ✚ PC Oscilloscopes
- ✚ Digital Multimeters



CONTENTS

01 About OWON

02 Development Milestone

03 Market Coverage

- Spectrum Analyzer

04 XSA1000TG Series - Spectrum Analyzer

- Digital Storage Oscilloscope

08 XDS3000 Series - your powerful n-in-1 on-site measurement station

12 XDS3000-E Series - your powerful n-in-1 on-site measurement station

14 TDS Series - Touch Screen Digital Storage Oscilloscope

16 SDS Series - Deep Memory Digital Storage Oscilloscope

18 SDS-E Series - 2G economical type digital storage oscilloscope

20 SDS1000 Series - super-economical type digital storage oscilloscope

22 MSO Series - Mixed LA - Oscilloscope

- Handheld Digital Storage Oscilloscope

24 HDS-N Series - Handheld Digital Storage Oscilloscope

26 HDS Series - 1-channel Handheld Digital Storage Oscilloscope

28 HDS-I Series - Handheld Digital Storage Oscilloscope w/ Channel Isolation

- PC Oscilloscope

30 VDS Series - PC Oscilloscope

- Waveform Generator

34 XDG3000 Series - Dual-channel Arbitrary Waveform Generator

36 AG-S Series - Single-channel Arbitrary Waveform Generator - {5 - 10MHz}

38 AG Series - Dual-channel Arbitrary Waveform Generator

40 AG-S Series - Single-channel Arbitrary Waveform Generator - {80 - 150MHz}

- Power Supply

42 SP Series - DC Power Supply

44 P4000 Series - Single Channel Linear DC Power Supply

46 ODP Series - Programmable DC Power Supply

- Digital Multimeter

52 XDM Series - Bench-type Digital Multimeter

56 OW Series - Bluetooth Digital Multimeter

62 DM Series - Bluetooth Digital Multimeter

67 Probes

About OWON®

Since 1990, Lilliput steps into the electronics product industry, its 1st product series is a mini color LCD.

Owned by Lilliput, OWON's product line was created to "Meet your best need" in the test and measurement equipment field.

Through 2 decades' of efforts, Lilliput gradually grew to be a group corporation, covering 3 product lines - mini color LCD, test and measurement equipment, and home energy management system.

OWON's products can be found in Asia, North America, Europe, South America, Oceania, and Africa, with global partners established in more than 80 countries/ regions.

Lilliput (OWON) spares no efforts to be one of top test and measurement equipment original equipment manufacturers in the world.



Development Milestone

2018

Jun XDG 250MHz Dual Channel Arbitrary Waveform Generator released

2017

Jun Digital spectrum analyzer released

2016

Oct XDS new member-14 bits high resolution mobile tester XDS3202A
Sep XDM series product - brand-new bench-type digital multimeter

2015

Jun 12-bit high resolution n-in-1 smart DSO - XDS series product created
Mar smart bluetooth digital multimeter launched

2014

Jun creative pen-type PC oscilloscope "Wave Rambler" released
Apr single-channel waveform generator AG-S series comes into being
Mar 4-channel PC oscilloscope VDS3104 added into VDS series

2013

Oct SDS-E Series - 2G economical digital storage oscilloscope
Jul new product TDS series touch screen digital storage oscilloscope
Apr new product VDS series PC oscilloscope

2012

Aug SDS5032E - 2G of PDS5022

2011

Nov AG4151 - DDS arbitrary waveform generator first debut in Shanghai Electronics Exhibition
Oct ISO9001 quality system certified
ODP3032 - programmable DC power supply unveiled in Hong Kong Electronics Exhibition

2010

Oct Smart DS series DSO with ultra-thin body, and 10M record length
Feb MSO8202T - 200MHz bandwidth mixed LA-supported DSO
Jan MSO8102T - 100MHz bandwidth mixed LA-supported DSO

2009

Oct HDS3102M-N - first 100MHz bandwidth handheld DSO made by China born
Apr innovative application of auto-measurement, and max 20 group measurement options equipped with full OWON product
Jan MSO7102T - mixed LA-supported DSO with 100MHz bandwidth, and 1GS/s real time sample rate, becomes new member of OWON product family

2008

Dec OWON receives the honor - "the highest cost performance product" from Wireless magazine
Apr PDS7102T - 100MHz bandwidth bench type DSO entering into product line

2007

Nov MSO5022S - mixed LA-supported DSO launched
Jun HDS-N series DSO - the upgraded version of HDS series

2006

Nov HDS2062M - 60MHz handheld DSO introduced
Sep PDS5022 - large 7.8" color LCD bench type DSO
Mar HDS1022M - first fine quality 2 in 1 handheld DSO created by China with high def color LCD

Market Coverage

With its headquarter located in Zhangzhou, Lilliput (OWON) establishes 4 offices in China, and 3 overseas offices, 2 of them in North America, 1 in Western Europe.

Lilliput (OWON) already successfully markets OWON product line into 80+ territories through its sales network.



Part of OWON product users - education field

Harvard University
The University of Iowa
The University of Western Ontario

Chiba University

Technische University Hamburg-Harburg
University degli Studi di Milano

University of Mosul

Sultan Qaboos University

Rabat Academy

XSA1000TG Series


Spectrum Analyzer



- + Frequency Range from 9 kHz up to 3.6 GHz
- + -160dBm Displayed Average Noise Level
- + Phase Noise -82dBc/Hz @1Gz and offset at 10kHz
- + Total Amplitude Accuracy <1.5dB
- + 10Hz Minimum Resolution Bandwidth (RBW)
- + EMI Pre-compliance Test Kit
- + 3.6 GHz Tracking Generator Kit (optional)
- + 10.4 inches display


1. 10 Hz Minimum Resolution Bandwidth (RBW)

Digital IF technology offers a minimum bandwidth of 10Hz, allowing excellent signal resolution when separation of closely spaced signals is required.

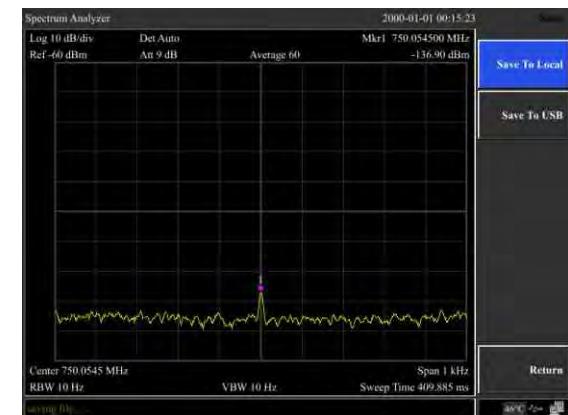


2. Measure -130dB small signal at 10Hz RBW

Offers a DANL (displayed average noise level) down to -130 dBm, which is able to measure smaller signals.

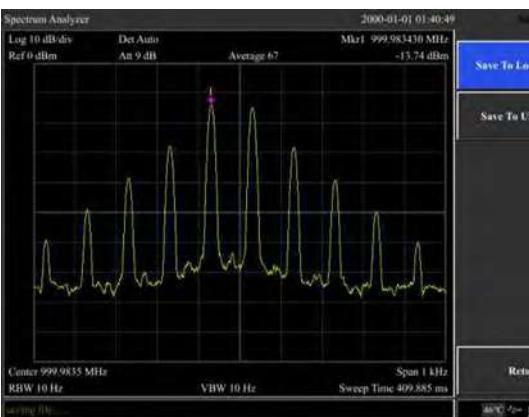

3. Phase noise: <-80 dBc/Hz @ 1 GHz @ 30 KHz offset

Excellent phase noise performance - <-80dBc/Hz @30KHz enables users to evaluate most synthesizers and signal generators.

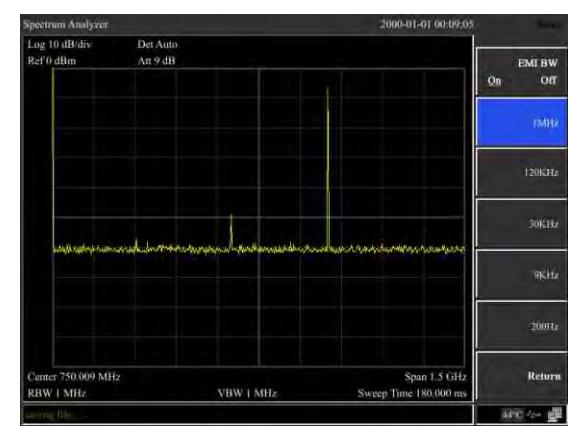

4. EMI filter and peak detector kit

OWON offers an EMI filter and peak detector kit to help evaluating EMI levels for pre-compliance testing.

Performance Specifications

Model	XSA1015-TG	XSA1032-TG	XSA1036-TG
Frequency			
Range	9kHz - 1.5 GHz	9kHz-3.2GHz	9kHz-3.6GHz
Resolution	1Hz		
Frequency span			
Range	0 Hz, 100 Hz to maximum frequency of device		
Accuracy	\pm span / (swept points -1)		
Internal reference			
Reference frequency	10.000000 MHz		
Reference frequency accuracy	\pm [(days from last calibrate x freq aging rate) + temperature stability + initial accuracy]		
Temperature stability	<2.5ppm(15°C~35°C)		
Aging rate	<1ppm/year		
Readout			
Marker frequency resolution	span/(the number of sweep points -1)		
Uncertainty	\pm (freq indication x freq reference uncertainty +1% \times span +10% x resolution bandwidth + Marker Frequency Resolution)		
Frequency counter			
Resolution	1 Hz, 10 Hz, 100 Hz, 1 kHz		
Accuracy	\pm (marker freq x freq reference uncertainty + counter resolution)		
Bandwidth			
Resolution bandwidth (-3 dB)	10Hz to 500kHz (in 1 to 10 sequence), 1MHz, 3MHz		
Resolution filter shape factor	<5: 1 nominal (Digital implement, similar to Gauss Pattern)		
Accuracy	<5% nominal		
Video bandwidth (-3 dB)	10Hz to 3MHz		
Amplitude and electric level			
Amplitude measurement range	DANL to +20 dBm, close the preamplifier		
Reference electric level	-80 dBm to +30 dBm, 0.1dBm steps		
Preamplifier	20 dB, nominal, 9 kHz to 3.6 GHz		
Input attenuator range	0~40 dB, in 1 dB steps.	0 to 50 dB, in 1 dB step	
Max input DC voltage	50 VDC		
Max continuous power	30dBm, average continuous power		
Displayed average noise level (DANL)			
Preamp off	Input attenuation 0 dB, 1Hz resolution bandwidth, RBW=10 Hz Normalization to 1 Hz 1 MHz~10 MHz -140dBm (typical) 10 MHz~1GHz -140dBm (typical) 1GHz~1.5 GHz -138 dBm (typical) 1GHz~3.2 GHz -138 dBm (typical) 1GHz~3.6 GHz -138 dBm (typical)		
Preamp on	1 MHz~10 MHz -160dBm (typical) 10 MHz~1GHz -160dBm (typical) 1GHz~1.5 GHz-158 dBm (typical) 1GHz~3.2 GHz-158 dBm (typical) 1GHz~3.6 GHz-158 dBm (typical)		
Phase			
20 °C ~ 30 °C, fc=1 GHz			
Phase noise			
<-82 dBc/Hz @10 kHz offset			
<-100 dBc/Hz @100 kHz offset			
<-110 dBc/Hz @1 MHz offset			

Model	XSA1015-TG	XSA1032-TG	XSA1036-TG
Level display range			
Log scale coordinate	1dB ~255dB		
Linear scale coordinate	0 to reference level		
level unit	dBm, dBuW, dBpW, dBmV, dBuV, W,V		
Points	201~1001		
Number of traces	5		
Detectors	Positive-peak, negative-peak, sample, normal, RMS		
Trace functions	Clear write, Max Hold, Min Hold, View, Blank, Average		
Frequency response			
	20°C ~30°C, 30%~70% relative humidity, 10 dB input attenuation, reference 50 MHz		
Preamp off (fc≥100k)	±0.8 dB;±0.4db.typical		
Preamp on(fc≥100MHz)	±0.9 dB;±0.5db.typical		
Accuracy			
Input Attenuation Switching Uncertainty	20°C ~30°C, fc=50 MHz, Preamplifier Off, 20dB RF attenuation, input signal 1~40 dB ±0.5 dB		
Absolute Amplitude ncertainty	20°C ~30°C, fc=50 Mhz, Span=200kHz, RBW=10 kHz, VBW=10 kHz, peak detector, 10 dB RF attenuation, Preamplifier Off ±0.4 dB, input signal= -20dBm Preamplifier On ±0.5 dB, input signal= -40dBm		
Uncertainty	input signal range 0dbm~-50dbm ±1.5 dB		
VSWR	input 10dB RF attenuation, 1 MHz~1.5GHz(XSA1015-TG) input 10dB RF attenuation, 1 MHz~3.2GHz(XSA1032-TG) input 10dB RF attenuation, 1 MHz~3.6GHz(XSA1036-TG) <1.5, nominal		
Distortion and spurious response			
Second harmonic distortion	fc ≥ 50 Mhz, Preamp off, signal input -10 dBm, 0 dB RF attenuation, 20 °C to 30 °C -65dbc		
Third-order intermodulation	fc ≥ 50 MHz +10 dBm		
1 dB Gain Compression	fc ≥ 50 MHz, 0 dB RF attenuation, Preamp off, 20 °C to 30 °C +2 dBm, nominal		
Residual response	connect 50 Ω load at input port, 0 dB input attenuation, 20 °C to 30 °C <-85dBm, nominated		
Input related spurious	-30 dBm signal at input mixer, 20 °C to 30 °C <-60 dBc		
Sweep			
Sweep time	100Hz≤SPAN≤3GHz 10ms to 3000s, None-zero Span 10ms to 3000s zero sweep width 1ms to 3000s, zero Span 10ms to 3000s		
Mode	Continue, single		
Trigger	Free run,video.		
Tracking generator			
Output frequency range	100 kHz~1.5 GHz(Tracking Generator)	100kHz-3.2GHz(tracking Generator)	100kHz~3.6GHz(tracking generator) 35MHz~3.6GHz(Signal generator)
Output power level range	-30 dBm~0 dBm		
Output power level resolution	1dB 35MHz~3.6GHz(Signal Generator)		
Output flatness	±3 dB		
Maximum safe reverse level	Average total power: ±20 dBm, DC : ±50 VDC		

Model	XSA1015-TG	XSA1032-TG	XSA1036-TG
Inputs and Outputs			
Front panel RF input connector	50 Ω, N-type female		
Front panel track generator output	50 Ω, N-type female		
10 M reference input	50 Ω, N-type female		
Communication port	USB HOST, USB DEVICE, LAN, earphone port, VGA, REF		
General technical specification			
Display	TFT LCD, 10.4 inches, 800 x 600 pixels		
Weight (without package)	5 kg		
Dimension (W × H × D)	421 × 221 × 115 (mm)		
Working temperature	0~40 °C		
Storage temperature	-20 °C to +60 °C		
Power	100V~240V 50/60Hz		

Specifications subject to change without prior notice.


+ Application

electronic circuit debugging
education and training


circuit testing design and manufacture
automobile maintenance and testing

+ Accessories

The accessories subject to final delivery.



Power Cord



USB Cable



CD-Rom



Manual

Optional Accessories



Near Field Probe includes:
Four near-field probes,
N-SMA adapter,
SMA-SMACable,
(Frequency range: 30MHz - 3GHz)



N-N Cable



N-SMA Cable



SMA-SMA Cable



SMA Adaptor

XDS3000 Series

your powerful n-in-1 on-site measurement station



14 / 12 bits high resolution ADC

Super Performance

- + 8-bit, 12-bit or 14-bit high resolution ADC, restoring the waveform detail fully
- + 40M record length, and 75,000 wfms/s waveform refresh rate
- + low background noise, vertical sensitivity in 1 mV/div - 10 V/div
- + multi-trigger, and bus decoding function
- + SCPI, and LabVIEW supported


Creative New Look

- + ultra-thin body-design, less space accommodation
- + multi-interface integration - USB host, USB device, USB port for PictBridge, LAN, AUX, and more
- + VGA port - better solution for video expansion, and teaching demonstration
- + 8 inch 800 x 600 high resolution LCD
- + optional multi-point touch screen, more user-friendly operation experience


n-in-1

functions as data logger, and multimeter with data logging function, and dual-channel 25MHz / 50MHz arbitrary waveform generator, furthermore, battery pack, and WiFi module supported

1. XDS series introduce 12 / 14 bits hardware ADC, the precision is 16/64 times against other oscilloscope on market. Equipping with OWON's original magnifier function, it can observe the signal low down to 31.25μV/div.

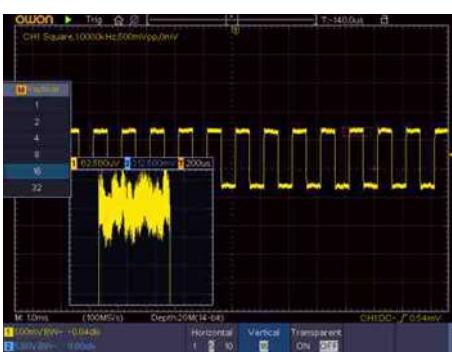


2. visual platform - restore the waveform detail fully




low background noise

M Length
1000
10K
100K
1M
10M
20M
40M


40M record length

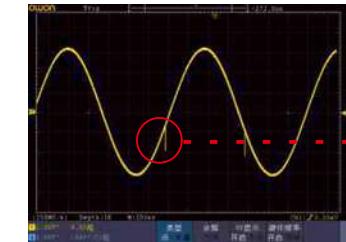

and 75,000 wfms/s refresh rate, easily capturing exceptional, and low probability events



3. multi-level grayscale, and color temperature display

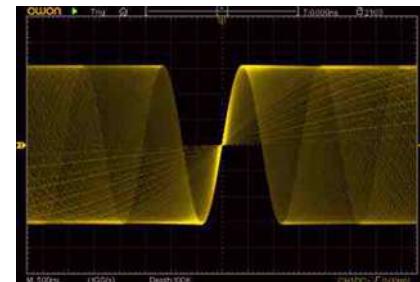

within certain unit time, more frequent one waveform pixel appears, more vivid it is

4. multi-trigger supported - Logic, Time-out, I²C, SPI, RS232, Runt, Windows, Nth Edge, and CAN

5. serial bus coding available in I²C, SPI, RS232, and CAN


M Bus Type
RS232
I ² C
SPI
CAN

M Single
Edge
Video
Pulse
Slope
Runt
Windows
Timeout
Nth Edge

8. its built-in WiFi module facilitates mobile device connecting with XDS series product, to get access to remote control, together with simultaneous measurement result display




via app s/w, waveform data-saving, checking, co-sharing is possible, co-analyzing hence realizes

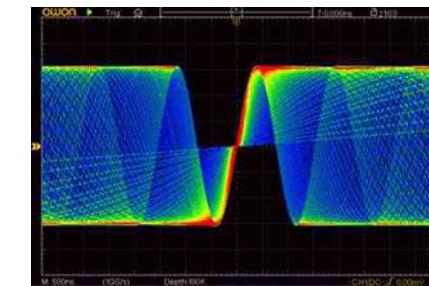

the frequency of waveform reflecting in color temperature value, larger the value is, more frequent the waveform appears

6. built-in multimeter module, with auto-scale, and data logging function

7. built-in dual-channel 25MHz / 50MHz arbitrary waveform generator module, with sample rate of 125MS/s / 250MS/s

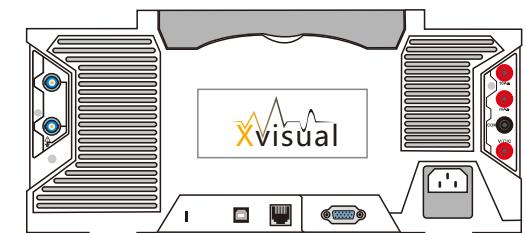

9. its multi-point touchscreen improves operation efficiency considerably



10. optional battery makes floating measurements possible, advancing the operation convenience



XDS3000 Series

your powerful n-in-1 on-site measurement station

+ Performance Specifications

Model	XDS3062A	XDS3102A	XDS3102AP*	XDS3202A*	XDS3102	XDS3202E	XDS3202*	XDS3302*
Bandwidth	60MHz	100MHz	100MHz	200MHz	100MHz	200MHz		300MHz
Sample Rate		1GS/s			1GS/s	2GS/s	2.5GS/s	
Vertical Resolution (A/D)	12 bits		14 bits			8 bits		
Record Length				40M				
Waveform Refresh Rate				75,000 wfms/s				
Horizontal Scale	2ns/div - 1000s/div	1ns/div - 1000s/div	2ns/div - 1000s/div		1ns/div - 1000s/div			
				step by 1 - 2 - 5				
Rise Time (at input, typical)	≤5.8ns	≤3.5ns	≤1.7ns	≤3.5ns	≤1.7ns	≤1.7ns	≤1.17ns	
Channel				2+1 (external)				
Display			8" color LCD, 800 x 600 pixels					
Input Impedance			1MΩ ± 2 %, in parallel with 15pF ± 5pF; (*50Ω ± 2%)					
Channel Isolation			50Hz : 100 : 1, 10MHz : 40 : 1					
Max Input Voltage			1MΩ ≤ 300VRMS; 50Ω ≤ 5VRMS					
DC Gain Accuracy	±1.5%			±3%				
DC Accuracy			average ≥ 16: ±(3% reading + 0.05 div) for △V					
Probe Attenuation Factor			0.001X - 1000X, step by 1 - 2 - 5					
LF Respond (AC,-3dB)			≥10Hz (at input, AC coupling, -3dB)					
Sample Rate / Relay Time Accuracy			±1ppm (Typical,Ta=+25°C)					
Interpolation			sin(x)/x, x					
Interval (△T) Accuracy (fullbandwidth)			Single: ±(1 interval time + 1ppm x reading + 0.6ns); Average > 16: ±(1 interval time + 1ppm x reading + 0.4ns)					
Input Coupling			DC, AC, and GND					
Vertical Sensitivity			1mV/div - 10V/div (at input)					
Trigger Type			Edge, Video, Pulse, Slope, Runt, Windows, Timeout, Nth Edge, Logic, I²C, SPI, RS232, and CAN (optional)					
Bus Decoding (optional)			I²C, SPI, RS232, and CAN					
Trigger Mode			Auto, Normal, and Single					
Vertical Range			±2V (1mv/div - 50mv/div), ±20V (100mv/div - 1V/div), ±200V (2V/div - 10V/div)					
Line / Field Frequency (video)			NTSC, PAL and SECAM standard					
Cursor Measurement			△V, and △T between cursors, △V and △T between cursors, and auto- cursors					
Automatic Measurement			Vpp, Vavg, Vrms, Freq, Period, Week RMS, Cursor RMS, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Phase, Preshoot, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Duty Cycle, Delay A→B↑, Delay A→B↓, +Pulse Count, -Pulse Count, Rise Edge Count, Fall Edge Count					
Waveform Math			+, -, x, ÷, FFT, FFT rms, Intg, Diff, Sqrt, User Defined Function, digital filter (low pass, high pass, band pass, bandreject)					
Waveform Storage			100 waveforms					
Lissajou's Figure	Bandwidth		full bandwidth					
	Phase Difference		±3 degrees					
Communication Interface			USB host, USB device, USB port for PictBridge, Trig Out (P/F), LAN, and VGA (optional)					
Frequency Counter			available					
Power Supply			100 - 240 V AC, 50/60Hz, CAT II					
Power Consumption			<15W					
Fuse			2A, T class, 250V					

Battery (optional)	3.7V, 13200mAh
Dimension (W x H x D)	340 x 177 x 90 (mm)
Device Weight	2.60 kg

+ Multimeter (optional) Specifications

Full Scale Reading	3 1/2 digits (max count)	Diode	0V - 1.5V
Input Impedance	10MΩ	Continuity Test	(±30) beeping
Capacitance			51.2nF - 100uF: ±(3% ± 3 digits)
Voltage			VDC: 400mV, 4V, 400V: ±(1 ± 1 digit); max input: DC 1000V VAC: 4V, 40V, 400V: ±(1 ± 3 digits); frequency: 40Hz - 400Hz; max input: AC 400V (virtual value)
Current			DC: 40mA, 400mA: ±(1.5% ± 1 digit); 10A: ±(3% ± 3 digits) AC: 40mA: ±(1.5% ± 3 digits), 400mA: ±(2% ± 1 digit), 10A: ±(3% ± 3 digits)
Impedance			400Ω: ±(1% ± 3 digits), 4KΩ - 40MΩ: ±(1% ± 1 digit)

+ Arb Waveform Generator (optional) Specifications

Max Frequency Output	25MHz
Sample Rate	125MS/s
Channel	available in 1-ch, or 2-ch
Vertical Resolution	14 bits
Amplitude Range	2mVpp - 6Vpp
Waveform Length	8K
Standard Waveform	Sine, Square, Pulse, and Ramp

+ Optional Module / Function

VGA	VGA + AV port
WIF	WiFi
AWG	arbitrary waveform generator
DMM	digital multimeter
TOU*	touch screen (capacitor-type)

* TOU option could be equipped as standard option as per request.


+ Optional Decoding Kit

RS232	Rs232
SPI	SPI
I2C	I2C
CAN	CAN decoding

Specifications subject to change without prior notice.

+ Accessories

The accessories subject to final delivery.

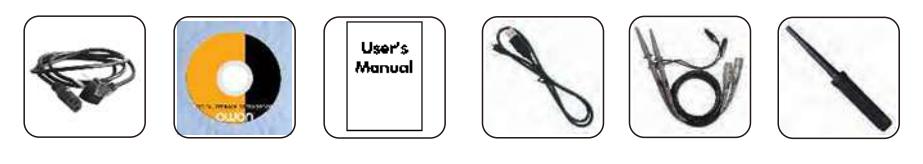

Power Cord



CD Rom



Manual



USB Cable



Probe



Probe Adjust




mobile app accessible via scanning QR code




Multimeter Lead




Q9



Capacitance Ext Module



Battery



Soft Bag



4-CH XDS3000-E Series



your powerful n-in-1 on-site measurement station

- + 60MHz-200MHz Bandwidth, 1GS/s sample rate
- + 8-bit or 14-bit high resolution ADC
- + 40M record length, max 70,000 wfms/s waveform refresh rate
- + low background noise
- + 8 inch 800 x 600 high resolution LCD, optional multi-touch screen, more user-friendly operation experience
- + SCPI, and LabVIEW supported
- + multi-trigger, and bus decoding function
- + multi-interface integration - USB host, USB device, USB port for PictBridge, LAN, AUX, and VGA

Performance Specifications

Model	XDS3064E	XDS3104E	XDS3064AE	XDS3104AE	XDS3104A	XDS3104	XDS3204AE	XDS3204E
Bandwidth	60MHz	100MHz	60MHz	100MHz		200MHz		
Sample Rate				1GS/s				
Vertical Resolution (A/D))	8 bits		14 bits		8bits	14 bits	8bits	
Record length			40M					
Waveform Refresh Rate		45,000 wfms/s			70,000wfms/s			
Horizontal Scale (s/div))		2ns/div - 1000s/div, step by 1 - 2 - 5		1ns/div - 1000s/div, step by 1 - 2 - 5				
Rise Time (at input, typical)	≤5.8ns	≤3.5ns	≤5.8ns		≤3.5ns		≤1.7ns	
Channel				4				
Display		8" color LCD, 800 x 600 pixels display						
Input Impedance		1MΩ ± 2%, in parallel with 15pF ± 5pF						
Channel Isolation		50Hz : 100 : 1, 10MHz : 40 : 1						
Max Input Voltage		1MΩ ≤ 300Vrms;						
DC Gain Accuracy		±3%						
DC Accuracy		average≥16: ± (3% +0.05div) for △V						
Probe Attenuation Factor		0.001X - 1000X, step by 1 - 2 - 5						
LF Respond (AC, -3dB)			≥10Hz					
Sample Rate / Relay Time Accuracy			±1ppm					
Interpolation		(sinx) / x, x						
Interval (△T) Accuracy (full bandwidth)		Single: ±(1 interval time + 1ppm x reading + 0.6ns); Average > 16: ±(1 interval time + 1ppm x reading + 0.4ns)						
Input Coupling		DC, AC, GND						
Vertical Sensitivity		1mV/div - 10V/div (at input)						
Trigger Type		Edge, Video, Pulse, Slope, Runt, Windows, Timeout, Nth Edge, Logic, I2C, SPI, RS232, and CAN (optional)						
Bus Decoding(optional)		I2C, SPI, RS232, CAN						
Trigger Mode		Auto, Normal, and Single						
Line / Field Frequency (video)		NTSC, PAL and SECAM standard						
Cursor Measurement		△V, and △T between cursors, △V and △T between cursors, and auto- cursors						
Automatic Measurement		Vpp, Vavg, Vrms, Freq, Period, Week RMS, Cursor RMS, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Phase, Preshoot, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Duty Cycle, Delay A→B↑, Delay A→B↓, Phase A→B↑, Phase A→B↓, +Pulse Count, -Pulse Count, Rise Edge Count, Fall Edges Count, Area, Cycle Area						

Waveform Math	+, -, *, /, FFT, FFTrms, Intg, Diff, Sqrt, User Defined Function, digital filter (low pass, high pass, band pass, band reject)		
Waveform Storage	100 waveforms		
Lissajou's Figure	full bandwidth	Full bandwidth	±3 degrees
Communication Interface	USB host, USB device, Trig Out (P/F), LAN, and VGA (optional) available		
Frequency Counter	100V - 240V AC, 50/60Hz, CAT II		
Power Supply	2A, T class, 250V		
Fuse	3.7V, 13200mA		
Battery (optional)	340mmx177mmx90mm		
Dimension (W x H x D)			

Multimeter (optional) Specifications

Full Scale Reading	3 1/2 digits (max 4000 count)	Diode	0V - 1.5V
Input Impedance	10MΩ	Continuity Test	<50 (±30) beeping
Capacitance	51.2nF - 100uF: ±(3% ± 3 digits)		
Voltage	DCV: 400mV, 4V, 400V: ±(1 ± 1 digit); max input: DC 1000V		
	ACV: 4V, 40V, 400V: ±(1 ± 3 digits); frequency: 40Hz - 400Hz; max input: AC 750V (virtual value)		
Current	DCA: 40mA, 400mA: ±(1.5% ± 1 digit); 10A: ±(3% ± 3 digits)		
	ACA: 40mA: ±(1.5% ± 3 digits), 400mA: ±(2% ± 1 digit), 10A: ±(3% ± 3 digits)		
Impedance	400Ω: ±(1% ± 3 digits), 4KΩ - 40MΩ: ±(1% ± 1 digit)		

Arb Waveform Generator (optional) Specifications

Max Frequency Output	25MHz
Sample Rate	125MS/s
Channel	1 channel (only apply to XDS3104(A), XDS3204E(AE)) 2 channels (only apply to XDS3064E, XDS3104E)
Vertical Resolution	14 bits
Amplitude Range	2mVpp - 6Vpp
Waveform Length	8K
Standard Waveform	Sine, Square, Pulse, Ramp
Arbitrary Waveform	Exponential Rise, Exponential Fall, Sin(x)/x, Step Wave, Noise, and others, total 46 built-in waveforms, and user-defined arbitrary waveform

Optional Module / Function

VGA	VGA + AV port
WIF	WiFi
AWG	arbitrary waveform generator
DMM	digital multimeter
TOU*	touch screen (capacitor-type)

RS232	RS232
SPI	SPI
I2C	I ² C
CAN	CAN decoding

Specifications subject to change without prior notice.

Accessories

Power Cord	CD Rom	Manual	USB Cable	Probe	Probe Adjust
optional accessories:					
Multimeter Lead	Q9	Capacitance Ext Module	Battery	Soft Bag	



mobile app accessible via scanning QR code



Touch Screen Digital Storage Oscilloscope



- + Max 200MHz bandwidth, up to 2GS/s realtime sample rate
- + 7.6M record length
- + 50,000 wfms/s waveform capture rate
- + waveform zooming (horizontal / vertical), and saving
- + FFT points (length, and resolution variable)
- + multi-window extension
- + 8 inch 800 x 600 pixels high resolution LCD
- + multi- communication interface : USB, VGA, and LAN
- + LabVIEW supported

+ Performance Specifications

Model	TDS7074	TDS7104	TDS8104	TDS8204
Bandwidth	70MHz		100MHz	200MHz
Channel			4	
Sample Rate	1GS/s		2GS/s	
Waveform Capture Rate			50,000 wfms/s	
Display			8" color LCD	
Input Coupling			DC, AC, and GND	
Input Impedance			1MΩ ± 2%, in parallel with 15pF ± 5pF ; 50Ω ± 1%	
Probe Attenuation Factor			1X, 10X, 100X, 1000X	
Max Input Voltage			1MΩ input impedance : 400V (DC + AC peak) ; 50Ω input impedance : 5V (DC + AC peak)	
Channel Isolation			50Hz: 100: 1 ; 10MHz: 40: 1	
Interpolation			sin(x)/x	
Record Length			7.6M	
Horizontal Scale (s/div)			2ns/div - 100s/div, step by 1 - 2 - 5	
Interval (ΔT) Accuracy (full bandwidth)			Single : ±(1 interval time + 100ppm × reading + 0.6ns), Average > 16 : ±(1 interval time + 100ppm × reading + 0.4ns)	
Vertical Resolution (A/D)			8 bits (4 channels simultaneously)	
Vertical Sensitivity			2mV/div - 10V/div (at input)	
Analog Bandwidth	70MHz		100MHz	200MHz
LF Respond (AC, -3dB)			≥10Hz (at input, AC coupling, -3dB)	
Rise Time	≤5ns		≤3.5ns	≤1.7ns

Model	TDS7074	TDS7104	TDS8104	TDS8204
DC Accuracy			±3%	
Trigger Type			Edge, Pulse, Video, and Slope	
Trigger Mode			Auto, Normal, and Single	
Trigger Level Range			±6 division from the screen center	
Trigger Level Accuracy (typical)			±0.3 division	
Line / Field Frequency (video)			NTSC, PAL, and SECAM standard	
Automatic Measurement			Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B _↑ , Delay A→B _↓ , +Width, -Width, +Duty, -Duty	
Waveform Math			+, -, *, /, FFT	
Waveform Storage			4 reference waveforms	
Lissajous Figure	Bandwidth		full Bandwidth	
	Phase Difference		±3 degrees	
Cursor Measurement			△V, and △T between cursors	
Communication Port			USB host, USB device, VGA (optional), and LAN	
Power Supply			100 - 240 V AC, 50/60Hz, CAT II	
Dimension (W x H x D)			380 x 180 x 115 (mm)	
Device Weight			1.50 kg	
			Specifications subject to change without prior notice.	

+ Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

+ Accessories

The accessories subject to final delivery.



Power Cord



CD Rom



Manual



USB Cable



Probe



Probe Adjust

Soft Bag
(optional)

Smart DS Series

Deep Memory Digital Storage Oscilloscope



- + Bandwidth : 60MHz - 300MHz with dual-channel
- + Sample rate : 500MS/s - 3.2GS/s
- + 10M record length for each channel
- + Smart design with easy portability
- + Large 8 inch 800 x 600 pixels LCD
- + LAN remote control
- + Multi-function : auto-scale, Pass / Fail, current measurement, and **digital filtering**
- + SCPI, and LabVIEW supported
- + Optional **BATTERY** available



Performance Specifications

Model	SDS6062	SDS7072	SDS7102	SDS7202	SDS8102	SDS8202	SDS8302	SDS9302
Bandwidth	60MHz	70MHz	100MHz	200MHz	100MHz	200MHz	300MHz	
Sample Rate	500MS/s		1GS/s		2GS/s	2.5GS/s	3.2GS/s	
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2 - 5		2ns/div - 100s/div, step by 1 - 2 - 5		1ns/div - 100s/div, step by 1 - 2 - 5			
Rise Time	≤5.8ns	≤5ns	≤3.5ns	≤1.7ns	≤3.5ns	≤1.7ns	≤1.17ns	
Display	8" color LCD, 800 x 600 pixels							
Channel	2 + 1 (external)							
Record Length	10M							
Input Coupling	DC, AC, and GND							
Input Impedance	1MΩ ± 2%, in parallel with 15pF ± 5pF							
Channel Isolation	50MHz : 100 : 1, 10MHz : 40 : 1							
Max Input Voltage	400V (DC + AC Peak)							
DC Gain Accuracy	±3%							
DC Accuracy	average≥16 : ±(3% reading + 0.05 div) for △V							
Probe Attenuation Factor	1X, 10X, 100X, 1000X							
LF Respond (AC, -3dB)	≥10Hz (at input, AC coupling, -3dB)							
Sample Rate / Relay Time Accuracy	±100ppm							
Interpolation	sin(x)/x							
Interval (△T) Accuracy (full bandwidth)	Single: ±(1 interval time + 100ppm × reading + 0.6ns); Average>16: ±(1 interval time + 100ppm × reading + 0.4ns)							
Vertical Resolution (A/D)	8 bits (2 channels simultaneously)							
Vertical Sensitivity	2mV/div - 10V/div							
Digital Filtering	low-pass, high-pass, band-pass, and band-reject							

Model	SDS6062 SDS7072 SDS7102 SDS7202 SDS8102 SDS8202 SDS8302 SDS9302
Trigger Type	Edge, Pulse, Video, Slope, and Alternate
Trigger Mode	Auto, Normal, and Single
Trigger Level	±6 divisions from screen center
Acquisition Mode	Sample, Peak Detect, and Average
Line / Field Frequency (video)	NTSC, PAL and SECAM standard
Cursor Measurement	△V, and △T between cursors
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Week RMS, Cursor RMS, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Phase, Preshoot, Rise Time, Fall Time, Delay A→B _L , Delay A→B _H , +Width, -Width, +Duty, -Duty, Duty cycle
Waveform Math	+, -, *, /, invert, FFT
Waveform Storage	15 waveforms
Lissajous Figure	Bandwidth
	full bandwidth
Phase Difference	±3 degrees
Communication Interface	USB host, USB device, Pass / Fail, LAN, VGA (optional), and RS232 (optional)
Frequency Counter	available
Power Supply	100V - 240V AC, 50/60Hz, CAT II
Power Consumption	< 18W < 24W
Fuse	2A, T class, 250V
Battery (optional)	7.4V, 8000mA
Dimension (W x H x D)	340 x 155 x 70 (mm)
Device Weight	1.80 kg

Specifications subject to change without prior notice.

Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

Accessories


The accessories subject to final delivery.



Power Cord CD Rom Manual USB Cable Probe Probe Adjust Battery (optional) Soft Bag (optional)

SDS-E Series

2G economical type digital storage oscilloscope

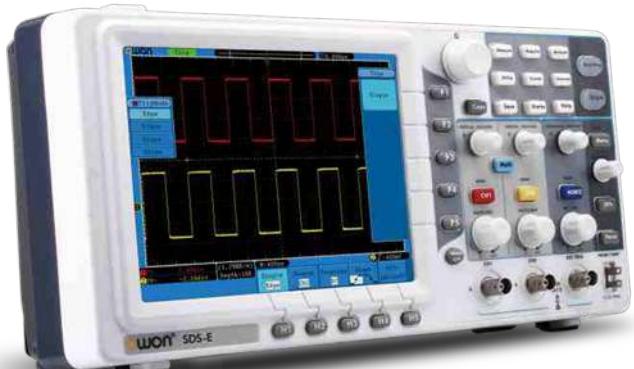

+ Performance Specifications

Model	SDS5032E	SDS5052E	SDS6062E	SDS7072E	SDS7102E	SDS7122E
Bandwidth	30MHz	50MHz	60MHz	70MHz	100MHz	125MHz
Sample Rate		500MS/s			1GS/s	
Horizontal Scale (s/div)		5ns/div - 100s/div, step by 1 - 2 - 5			2ns/div - 100s/div, step by 1 - 2 - 5	
Rise Time (at input, typical)	≤11ns	≤7ns	≤5.8ns	≤5ns	≤3.5ns	≤2.8ns
Channel			2 + 1 (external)			
Display			8" color LCD, 800 x 600 pixels			
Input Impedance			1MΩ ± 2%, in parallel with 15pF ± 5pF			
Channel Isolation			50Hz : 100 : 1, 10MHz : 40 : 1			
Max Input Voltage			400V (DC + AC peak)			
DC Gain Accuracy			±3%			
Record Length	10K	1M	1M (optional 10M)			
DC Accuracy (average)		average≥16: ±(3% reading + 0.05 div) for △V				
Probe Attenuation Factor	1X, 10X, 100X, 1000X		0.1X, 1X, 10X, 100X, 1000X			
LF Respond (AC, -3dB)		≥10Hz (at input, AC coupling, -3dB)				
Sample Rate / Relay Time Accuracy		±25ppm				
Interpolation		sin(x)/x				
Interval (△T) Accuracy (full bandwidth)		Single: ±(1 interval time + 100ppm × reading + 0.6ns), Average>16: ±(1 interval time + 25ppm × reading + 0.4ns)				
Input Coupling		DC, AC , and GND				
Vertical Resolution (A/D)		8 bits (2 channels simultaneously)				
Vertical Sensitivity	5mV/div - 5V/div (at input)	2mV/div - 10V/div (at input)				
Digital Filtering	/	low-pass, high-pass, band-pass, and band-reject				

Model	SDS5032E	SDS5052E	SDS6062E	SDS7072E	SDS7102E	SDS7122E					
Trigger Type	Edge, Pulse, Video, Slope, and Alternate										
Trigger Mode	Auto, Normal, and Single										
Trigger Level	±6 divisions from screen center										
Line / Field Frequency (video)	NTSC, PAL, and SECAM standard										
Cursor Measurement	△V, and △T between cursors										
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Week RMS, Cursor RMS, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Phase, Preshoot, Rise Time, Fall Time, Delay A→B, Delay A→B, +Width, -Width, +Duty, -Duty, Duty cycle										
Waveform Math	+, -, *, /, invert, FFT										
Waveform Storage	15 waveforms										
Lissajous Figure	Bandwidth	full bandwidth									
	Phase Difference	±3 degrees									
Communication Interface	USB host, USB device, Pass / Fail, LAN, and VGA (optional)										
Frequency Counter	available										
Power Supply	100V - 240V AC, 50/60Hz, CAT II										
Power Consumption	< 15W										
Fuse	2A, T class, 250V										
Battery	not supported										
Dimension (W x H x D)	348 x 170 x 78 (mm)										
Device Weight	1.50 kg										
	Specifications subject to change without prior notice.										

+ Application

electronic circuit debugging
education and training circuit testing design and manufacture
automobile maintenance and testing

+ Accessories


The accessories subject to final delivery.




Power Cord CD Rom Manual USB Cable Probe Probe Adjust Soft Bag (optional)

SDS1000 Series

super-economical type digital storage oscilloscope

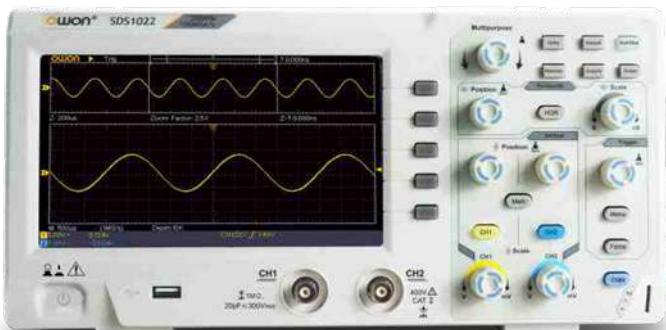

7" high resolution LCD

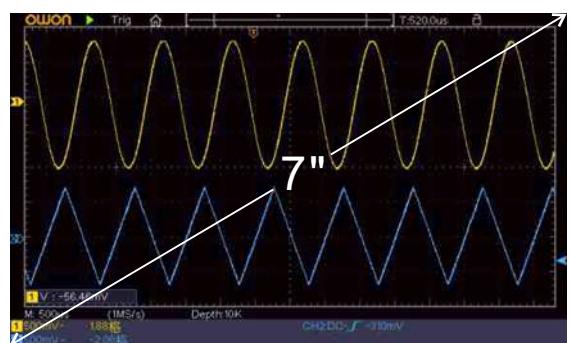


ultra-thin device body,
assures super portability


sided power socket better suit for
industrial environment measurement



windows extension

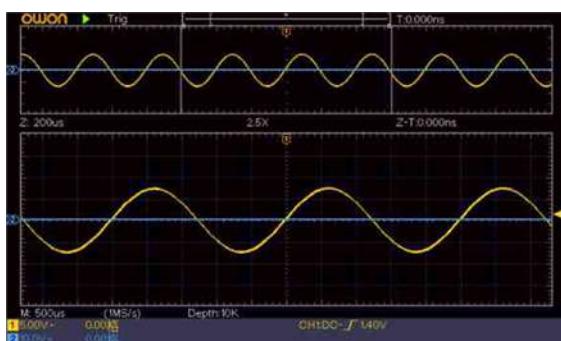

snapshot

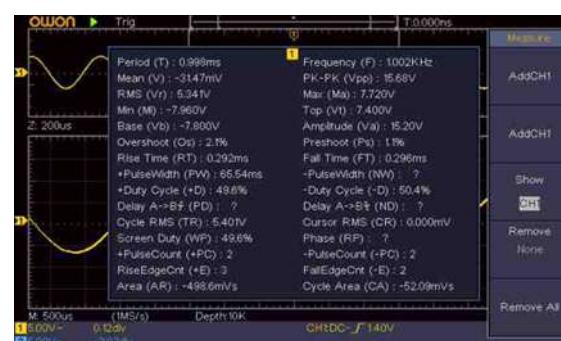

Performance Specifications

Model	SDS1022	SDS1052	SDS1102	SDS1202
Bandwidth	20MHz	50MHz	100MHz	200MHz
Sample Rate	100MS/s	500MS/s	1GS/s	
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2 - 5	2ns/div - 100s/div, step by 1 - 2 - 5		
Rise Time (at input, typical)	≤17.5ns	≤7ns	≤3.5ns	≤1.7ns
Channel	2			
Display	7" color LCD, 800 x 480 pixels			
Input Impedance	1MΩ ± 2%, in parallel with 20pF±5pF			

Model	SDS1022	SDS1052	SDS1102	SDS1202
Channel Isolation	50Hz : 100 : 1, 10MHz : 40 : 1			
Max Input Voltage	400V (PK - PK) (DC+AC, PK - PK)			
DC Gain Accuracy	±3%			
Record Length	10K			
DC Accuracy (average)	Average≥16: ±(3% reading + 0.05 div) for ΔV			
Probe Attenuation Factor	1X, 10X, 100X, 1000X			
LF Respond (AC, -3dB)	≥10Hz (at input, AC coupling, -3dB)			
Sample Rate / Relay Time Accuracy	±100ppm			
Interpolation	$\sin(x)/x$			
Interval (ΔT) Accuracy (full bandwidth)	Single: ±(1 interval time + 100ppm x reading + 0.6ns), Average>16: ±(1 interval time + 100ppm x reading + 0.4ns)			
Input Coupling	DC, AC, and GND			
Vertical Resolution (A/D)	8 bits (2 channels simultaneously)			
Vertical Sensitivity	5mV/div - 5V/div (at input)			
Trigger Type	Edge, Video			
Trigger Mode	Auto, Normal, and Single			
Trigger Level	±5 divisions from screen center			
Line / Field Frequency (video)	NTSC, PAL and SECAM standard			
Cursor Measurement	ΔV , and ΔT between cursors			
Automatic Measurement	Vpp, Vavg, RMS, Frequency, Period, Vmax, Vmin, Vtop, Vbase, Width, Overshoot, Pre-shoot, Rise time, Fall time, +Width, -Width, +Duty, -Duty, Delay A→B↑, Delay A→B↓			
Waveform Math	+, -, x, ÷, invert, FFT			
Waveform Storage	16 waveforms			
Lissajous Figure	Bandwidth full bandwidth			
	Phase Difference ±3 degrees			
Communication Interface	USB host, USB device			
Frequency Counter	available			
Power Supply	100V - 240V AC, 50/60Hz, CAT II			
Power Consumption	< 15W			
Fuse	2A, T class, 250V			
Dimension (W x H x D)	301 x 152 x 70 mm			
Device Weight	1.10 kg			

Specifications subject to change without prior notice.

Application

electronic circuit debugging
education and training

circuit testing
design and manufacture
automobile maintenance and testing

Accessories

The accessories subject to final delivery.



Power Cord



CD Rom



Manual



USB Cable



Probe



Probe Adjust
(optional)



Soft Bag
(optional)



- + 2 in 1 (DSO + Multimeter)
- + Auto-scale function
- + FFT function
- + 20 group automatic measurement options
- + Bandwidth : 20MHz - 200MHz
- + USB data transmission supported
- + Rechargeable Li-ion battery (6 hours' backup)
- + Waveform record and replay
- + Multimeter newly supported SCPI

Performance Specifications

Model	HDS1022M-N	HDS2062M-N	HDS3102M-N	HDS4202M-N
Bandwidth	20MHz	60MHz	100MHz	200MHz
Sample Rate	100MS/s		1GS/s	
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2.5 - 5	5ns/div - 100s/div, step by 1 - 2 - 5	2ns/div - 100s/div, step by 1 - 2 - 5	
Rise Time (at input, typical)	≤ 17.5ns	≤ 5.8ns	≤ 3.5ns	≤ 1.7ns
Display	3.7" color TFT display (640 x 480 pixels)			
Channel	dual			
Input Impedance	1MΩ ± 2%, in parallel with 20pF ± 5pF	1MΩ ± 2%, in parallel with 15pF ± 5pF		
Record Length	6K points			
Interpolation	sin(x)/x			
Probe Attenuation Factor	1X, 10X, 100X, 1000X			
Input Coupling	DC, AC, and GND			
DC Accuracy (average)	average >16 : ±(5% reading + 0.05 div) for △V			
Vertical Sensitivity	5mV/div - 5V/div (at input)			
Vertical Resolution (A/D)	8 bits			
Max Input Voltage	400V (DC + AC peak), CAT II			
Trigger Type	Edge, Video, and Alternate			
Trigger Mode	Auto, Normal, and Single			
Trigger Level	±6 divisions from screen center			
Acquisition Mode	Sample, Peak Detect, and Average			
DC Gain Accuracy	±3%			
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B↑, Delay A→B↓, +Width, -Width, +Duty, -Duty			

Model	HDS1022M-N	HDS2062M-N	HDS3102M-N	HDS4202M-N
Waveform Math			+, -, *, /, invert, FFT	
Waveform Storage			4 waveforms	
Lissajous Figure	Bandwidth		full bandwidth	
	Phase Difference		± 3degrees	
Communication Interface			USB	
Power Supply			100V-240V AC, 50/60Hz	
Li-ion Battery			7.4V, 6 hours' operation	
Dimensions (W x H x D)			115 x 180 x 40 (mm)	
Device Weight			645.00 g	

Multimeter Specifications

Full Scale Reading	3½ digits (max 4000 count)	Diode	0V - 1.5V
Input Impedance	10 MΩ	On / Off Test	<50 (± 30) beeping
Voltage	VDC : 400mV, 4V, 40V, 400V, 1000V : ±(1% ± 1 digit); max input : DC 1000V VAC : 4V, 40V, 400V : ±(1% ± 3 digits), 750V : ±(2% ± 3 digits); Frequency : 40Hz - 400Hz; max input : AC 750V (virtual value)		
Current	DC : 40mA, 400mA : ±(1.5% ± 1 digit), 10A : ±(3% ± 3 digits) AC : 40mA : ±(1.5% ± 3 digits), 400mA : ±(2% ± 1 digit), 10A : ±(5% ± 3 digits)		
Impedance	400Ω : ±(1% ± 3 digits), 40KΩ - 4MΩ : ±(1% ± 1 digit), 40MΩ : ±(1.5% ± 3 digits)		
Capacitance	51.2nF - 100uF : ±(3% ± 3 digits)		

Specifications subject to change without prior notice.

Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

Accessories

The accessories subject to final delivery.

	Power Cord		CD Rom		Manual		USB Cable		Probe		Probe Adjust		Multimeter Lead		Adapter		5V, 1KHz Output
	Capacitance Ext Module		Soft Bag (optional)		Metal Case												



- + 2 in 1 (DSO + LA)
- + 8 inch color LCD
- + USB data transmission supported
- + 20 automated measurements

Digital Storage Oscilloscope

- + Bandwidth : 60MHz - 200MHz
- + Sample rate : up to 2GS/s
- + Auto-scale function
- + FFT

Logic Analyzer

- + Bandwidth : 100MHz - 200MHz
- + Sample rate : max 1GS/s
- + 16 input channels

Digital Storage Oscilloscope Performance Specifications

Model	MSO7062TD	MSO7102TD	MSO8102T	MSO8202T
Bandwidth	60MHz	100MHz	200MHz	
Sample Rate	1GS/s		2GS/s	
Rise Time	≤5.8ns	≤3.5ns	≤1.7ns	
Display		8" color LCD , 640 x 480 pixels		
Channel		dual + external trigger		
Horizontal Scale (s/div)	2ns/div - 100s/div, step by 1 - 2 - 5	1ns/div - 100s/div, step by 1 - 2 - 5		
DC Accuracy (average)		average>16 : ±(3% reading + 0.05div) for ΔV		
Vertical Sensitivity		2mV/div - 10V/div		
DC Gain Accuracy		±3%		
Vertical Resolution (A/D)		8 bits (2 channels simultaneously)		
Interpolation		$\sin(x)/x$		
Max Input Voltage		400V (DC + AC peak)		
Probe Attenuation Factor		1X, 10X, 100X, 1000X		
Trigger Mode		Edge, Video, Alternate, Pulse, and Slope		
Acquisition Mode		Normal, Peak Detect, and Average		
Record Length		2M points		
Waveform Storage		4 waveforms		
Automatic Measurement		Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B _L , Delay A→B _H , +Width, -Width, +Duty, -Duty		
Waveform Math		+, -, *, /, invert, FFT		
Power Supply		100 - 240V AC, 50Hz / 60Hz, CAT II		

Model	MSO7062TD	MSO7102TD	MSO8102T	MSO8202T
Lissajous Figure	Bandwidth	60MHz	100MHz	200MHz
	Phase Difference		±3 degrees	
Communication Interface		USB host, VGA (optional), and USB device		
Fuse		1A, T class, 250V		
Battery		7.4V 8000mAh (optional)		
Dimensions (W x H x D)		370 x 180 x 120 (mm)		
Device Weight		2.20 kg		

Logic Analyzer Performance Specifications

Model	MSO7062TD	MSO7102TD	MSO8102T	MSO8202T
Sample Rate		20S/s - 1GS/s		
Bandwidth		100MHz		200MHz
Channel		16		
Record Length		4M points		
Input Impedance		660KΩ ± 5%, in parallel with 15 ± 5pF		
Trigger Mode		Edge, Bus, State, Data Alignment, Data Width, and Distributed Queue		
Trigger Position Setting		Pre-trigger, Mid-trigger, and Re-trigger		
Threshold Voltage		±6V (4 settings)		
Input Signal Range		±30V		
Data Search		available		
Data System		binary, decimal, and hex		
Digital Filter		0, 1, 2 optional		
Setting Storage		10 settings		
USB Flash Disk Storage		available		

Specifications subject to change without prior notice.

Application

design and debug circuit function test education and training mixed signal circuit test

Accessories


The accessories subject to final delivery.



Power Cord CD Rom Manual USB Cable Probe Probe Adjust Logic Analyzer Module Battery (optional) Soft Bag (optional)

HDS Series

1-channel Handheld Digital Storage Oscilloscope

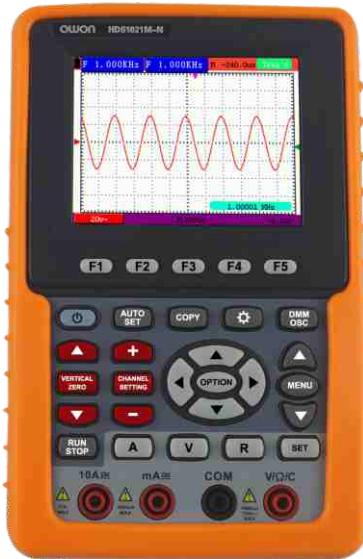

- + 2 in 1 (DSO + Multimeter)
- + Auto-scale function
- + FFT function
- + 20 group automatic measurement options
- + Bandwidth : 20MHz - 100MHz
- + USB data transmission supported
- + Rechargeable Li-ion battery (6 hours' backup)
- + Waveform record and replay
- + Multimeter newly supported SCPI

► Multimeter Specifications

Full Scale Reading	3½ digits (max 4000 count)	Diode	0V - 1.5V		
Input Impedance	10 MΩ	On / Off Test	<50 (± 30) beeping		
Voltage			VDC : 400mV, 4V, 40V, 400V, 1000V : ±(1% ± 1 digit); max input : DC 1000V VAC : 4V, 40V, 400V : ±(1% ± 3 digits), 750V : ±(2% ± 3 digits); Frequency : 40Hz - 400Hz; max input : AC 750V (virtual value)		
Current			DC : 40mA, 400mA : ±(1.5% ± 1 digit), 10A : ±(3% ± 3 digits) AC : 40mA : ±(1.5% ± 3 digits), 400mA : ±(2% ± 1 digit), 10A : ±(5% ± 3 digits)		
Impedance	400Ω : ±(1% ± 3 digits), 40KΩ - 4MΩ : ±(1% ± 1 digit), 40MΩ : ±(1.5% ± 3 digits)	Capacitance	51.2nF - 100μF : ±(3% ± 3 digits)		

Specifications subject to change without prior notice.

► Performance Specifications

Model	HDS1021M-N	HDS2061M-N	HDS3101M-N
Bandwidth	20MHz	60MHz	100MHz
Sample Rate	500MS/s	500MS/s	1GS/s
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2.5 - 5	5ns/div - 100s/div, step by 1 - 2 - 5	
Rise Time (at input, typical)	≤ 17.5ns	≤ 5.8ns	≤ 3.5ns
Display	3.7" color TFT display (640 x 480 pixels)		
Channel	single		
Input Impedance	1MΩ ± 2%, in parallel with 18pF ± 5pF	1MΩ ± 2%, in parallel with 15pF ± 5pF	
Record Length	24K points		
Interpolation	sin(x)/x		
Probe Attenuation Factor	1X, 10X, 100X, 1000X		
Input Coupling	DC, AC, and GND		
DC Accuracy (average)	average >16 : ±(5% reading + 0.05 div) for △V		
Vertical Sensitivity	5mV/div - 5V/div (at input)		
Vertical Resolution (A/D)	8 bits		
Max Input Voltage	400V (DC + AC peak), CAT II		
Trigger Type	Edge, and Video		
Trigger Mode	Auto, Normal, and Single		
Trigger Level	±6 divisions from screen center		
Acquisition Mode	Sample, Peak Detect, and Average		
DC Gain Accuracy	±3%		
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B, Delay A→B, +Width, -Width, +Duty, -Duty		
Waveform Storage	4 waveforms		
Communication Interface	mini-USB mini-RS232		
Power Supply	100V-240V AC, 50/60Hz		
Li-ion Battery	7.4V, 6 hours' operation		
Dimensions (W x H x D)	115 x 180 x 40 (mm)		
Device Weight	645.00 g		

► Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

design and manufacture

► Accessories

The accessories subject to final delivery.



Power Cord CD Rom Manual USB Cable Probe Probe Adjust Multimeter Lead Adapter 5V, 1kHz Output



Capacitance Ext Module Soft Bag Metal Case (optional)

HDS-I Series

Handheld DSO w/ Channel Isolation



- + 2 in 1 (DSO + Multimeter)
- + with good ISOLATION between channels
- + Auto-scale function
- + FFT function
- + 20 group automatic measurement options
- + Bandwidth : 20MHz
- + USB data transmission supported
- + Rechargeable Li-ion battery
- + Multimeter newly supported SCPI

Model	HDS1022M-I
Cursor Measurement	ΔV , and ΔT between cursors
Communication Interface	USB host, and USB device
Battery	built-in Li-ion battery, 7.4V / 3500mAh
Dimensions (W x H x D)	113 x 180 x 40 (mm)
Device Weight	645.00 g

► Multimeter Specifications

Full Scale Reading	3½ digits (max 4000 count)	Diode	0V - 1.5V
Input Impedance	10 MΩ	On / Off Test	<50 (± 30) beeping
Voltage	VDC : 400mV, 4V, 400V, 1000V : $\pm(1\% \pm 1$ digit); max input : DC 1000V VAC : 4V, 40V, 400V : $\pm(1\% \pm 3$ digits), Frequency : 40Hz - 400Hz; max input : AC 750V (virtual value)		
Current	DCA: 40mA, 400mA: $\pm(1.5\% \pm 1$ digit), 10A: $\pm(3\% \pm 3$ digits) ACA: 40mA: $\pm(1.5\% \pm 3$ digits); 400mA: $\pm(2 \pm 1$ digit); 10A: $\pm(3\% \pm 3$ digits)		
Impedance	400Ω: $\pm(1\% \pm 3$ digits); 4KΩ / 40KΩ / 400 KΩ / 4MΩ: $\pm(1\% \pm 1$ digit); 40MΩ: $\pm(1.50\% \pm 3$ digits)		
Capacitance	51.2nF - 100μF: $\pm(3\% \pm 3$ digits)		

Specifications subject to change without prior notice.

► Performance Specifications

Model	HDS1022M-I
Bandwidth	20MHz
Sample Rate	100MS/s
Rise Time (at input, typical)	≤ 17.5 ns
Record Length	6K points
Channel	dual, insulated ground of 1000 : 1
Display	3.7" color TFT LCD, 640 x 480 pixels
Floating Meas. Channel	insulated input ground between multimeter / oscilloscope mode
Input Coupling	DC, AC, and GND
Input Impedance	1MΩ ± 2%, in parallel with 15pF ± 5pF
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2 - 5
Interval (ΔT) Accuracy	single: $\pm(1$ interval time + 100ppm x reading + 0.6ns), average >16: $\pm(1$ interval time + 100ppm x reading + 0.4ns)
Vertical Sensitivity	5mV/div - 5V/div (at input)
Vertical Resolution (A/D)	8 bits
Max Input Voltage	400V (DC + AC peak), CAT II
Trigger Type	Edge Video
Trigger Mode	Auto, Normal, and Single
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B ₁ , Delay A→B ₂ , +Width, -Width, +Duty, -Duty
DC Accuracy (average)	average >16 : $\pm(5\%$ reading + 0.05 div) for ΔV
Waveform Math	+, -, *, /, invert, FFT
Waveform Storage	4 waveforms
Lissajous Figure	full bandwidth
Phase Difference	± 3 degrees

► Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

► Accessories

The accessories subject to final delivery.



Power Cord CD Rom Manual USB Cable Probe Probe Adjust Multimeter Lead Adapter 5V, 1KHz Output



Capacitance Ext Module Soft Bag (optional) Metal Case

VDS Series PC Oscilloscope



- + Up to 100MHz bandwidth, and max 1GS/s real-time sample rate
- + Max 10M record length
- + Friendly UI : FFT, or X-Y, and waveform 2 views displayed on the same screen
- + Multi-trigger option : edge, video, slope, pulse, and alternate
- + USB isolation - less signal interference, more PC protection
- + USB bus powering, and LAN remote control (optional)
- + Ultra-thin body design, easy portability
- + SCPI supported
- + LabVIEW supported (only in VDS3102)

Model	VDS1022I	VDS1022	VDS2062	VDS3102
Vertical Sensitivity			2mV/div - 5V/div	
Trigger Type		Edge, Pulse, Video, Slope, and Alternate		
Trigger Mode		Auto, Normal, and Single		
Trigger Level		±5 divisions from screen center		
Acquisition Mode		Sample, Peak Detect, and Average		
Line / Field Frequency (video)		NTSC, PAL, and SECAM standard		
Cursor Measurement		△V, and △T between cursors		
Automatic Measurement		Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B, Delay A→B, +Width, -Width, +Duty, -Duty		
Waveform Math		+, -, *, /, invert, FFT		
Lissajous Figure	Bandwidth	full bandwidth		
	Phase Difference	±3 degrees		
Communication Interface	USB2.0 (isolation)	USB2.0		USB2.0, LAN (optional)
Multi-function Interface	Signal Type	synchronized input / output, Pass / Fail, external trigger input		
	Level Standard	TTL		
Power Supply	5.0V/500mA		5.0V / 1.5A	
Power Consumption	≤2.5W		≤6.5W	
Dimensions (W x H x D)	170 x 120 x 18 (mm)		190 x 120 x 18 (mm)	
Device Weight		0.26 kg		

Specifications subject to change without prior notice.

Performance Specifications


Model	VDS1022I	VDS1022	VDS2062	VDS3102
Bandwidth	25MHz	60MHz	100MHz	
Channel		2+1 (multi)		
Sample Rate	100MS/s		1GS/s	
Horizontal Scale (s/div)	5ns/div - 100s/div, step by 1 - 2 - 5		2ns/div - 100s/div, step by 1 - 2 - 5	
Rise Time	≤14ns	≤5.8ns	≤3.5ns	
Record Length	5K		10M	
Input Coupling		DC, AC, and GND		
Input Impedance	1MΩ ± 2%, in parallel with 15pF ± 5pF			
Channel Isolation		50Hz : 100 : 1 ; 10MHz : 40 : 1		
Max Input Voltage	400V (DC + AC peak)	40V (DC + AC peak)		
DC Gain Accuracy		±3%		
DC Accuracy		Average ≥ 16 : ±(3% reading + 0.05 div) for △T		
Probe Attenuation Factor		1X, 10X, 100X, 1000X		
LF Respond (AC, -3dB)		≥10Hz (at input, AC coupling, -3dB)		
Sample Rate / Relay Time Accuracy		150ps		
Interpolation		sin(x)/x		
Interval (△T) Accuracy (full bandwidth)		Single : ± (1 interval time + 100ppm × reading + 0.6ns), Average > 16 : ±(1 interval time + 100ppm × reading + 0.4ns)		
Vertical Resolution (A/D)		8 bits (2 channels simultaneously)		

Application

design and debug circuit function test education and training

Accessories

The accessories subject to final delivery.

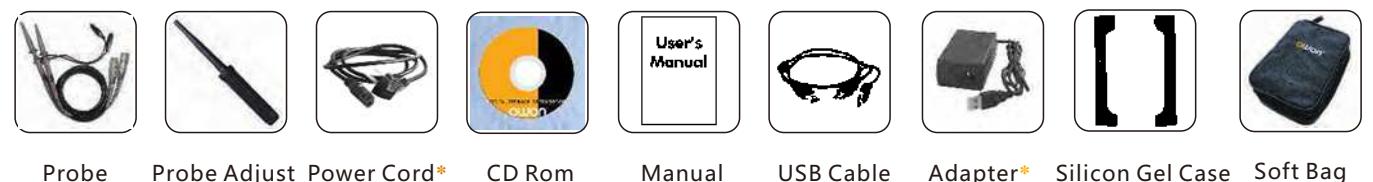

* Power cord and adapter only available for models with LAN port.

4-CH

VDS Series

PC Oscilloscope



- + Up to 100MHz bandwidth, and max 1GS/s real-time sample rate
- + Max 5M record length
- + Friendly UI : FFT, or X-Y, and waveform 2 views displayed on the same screen
- + Multi-trigger option : edge, video, slope, pulse, and alternate
- + USB isolation - less signal interference, more PC protection
- + USB bus powering, and LAN remote control (optional)
- + Ultra-thin body design, easy portability
- + SCPI supported
- + LabVIEW supported (only in VDS3104)

+ Performance Specifications

Model	VDS2064	VDS3104
Bandwidth	60MHz	100MHz
Channel	4+1 (multi)	
Sample Rate	1GS/s	
Horizontal Scale (s/div)	2ns/div - 100s/div, step by 1 - 2 - 5	
Rise Time	≤5.8ns	≤3.5ns
Record Length	5M	
Input Coupling	DC, AC, and GND	
Input Impedance	1MΩ ± 2%, in parallel with 10pF ± 5pF	
Channel Isolation	50Hz : 100 : 1 ; 10MHz : 40 : 1	
Max Input Voltage	40V (DC + AC peak)	
DC Gain Accuracy	±3%	
DC Accuracy	Average ≥ 16 : ±(3% reading + 0.05 div) for ΔT	
Probe Attenuation Factor	1X, 10X, 100X, 1000X	
LF Respond (AC, -3dB)	≥10Hz (at input, AC coupling, -3dB)	
Sample Rate / Relay Time Accuracy	150ps	
Interpolation	sin(x)/x	
Interval (ΔT) Accuracy (full bandwidth)	Single : ± (1 interval time + 100ppm × reading + 0.6ns), Average > 16 : ±(1 interval time + 100ppm × reading + 0.4ns)	
Vertical Resolution (A/D)	8 bits (2 channels simultaneously)	


Model	VDS2064	VDS3104
Vertical Sensitivity		2mV/div - 5V/div
Trigger Type		Edge, Pulse, Video, Slope, and Alternate
Trigger Mode		Auto, Normal, and Single
Trigger Level		±5 divisions from screen center
Acquisition Mode		Sample, Peak Detect, and Average
Line / Field Frequency (video)		NTSC, PAL, and SECAM standard
Cursor Measurement		△V, and △T between cursors
Automatic Measurement		Vpp, Vavg, Vrms, Freq, Period, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Preshoot, Rise Time, Fall Time, Delay A→B, Delay A→B, +Width, -Width, +Duty, -Duty
Waveform Math		+, -, *, /, invert, FFT
Lissajous Figure	Bandwidth	full bandwidth
	Phase Difference	±3 degrees
Communication Interface		USB2.0, LAN (optional)
Multi-function Interface	Signal Type	synchronized input / output, Pass / Fail, external trigger input
	Level Standard	TTL
Power Supply		5.0V / 1.5A
Power Consumption		≤6.5W
Dimensions (W x H x D)		190 x 120 x 18 (mm)
Device Weight		0.30 kg
		Specifications subject to change without prior notice.

+ Application

design and debug circuit function test education and training

+ Accessories

The accessories subject to final delivery.

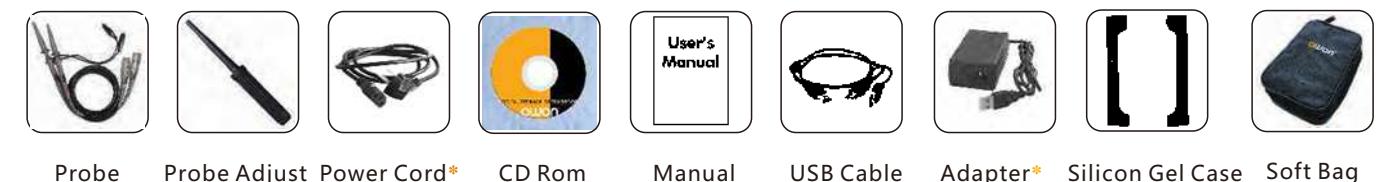

Probe Probe Adjust Power Cord* CD Rom Manual USB Cable Adapter* Silicon Gel Case Soft Bag (optional)

* Power cord and adapter only available for models with LAN port.

XDG3000 Series



Dual-channel Arbitrary Waveform Generator

- + Advanced DDS technology, Max 250MHz frequency output
- + Max 1.25GS/s sample rate, and 1 μ Hz frequency resolution
- + Vertical Resolution :14 bits, max 1M arb waveform length
- + Comprehensive waveform output : 6 basic waveforms, and 152 built-in arbitrary waveforms
- + Comprehensive modulation functions : AM, FM, PM, FSK, 3FSK, 4FSK, PSK, OSK, ASK, BPSK, PWM, Sweep, and Burst
- + High-accuracy frequency counter integrated, supported range 100mHz - 200MHz
- + SCPI, and LabVIEW supported
- + 8 inch high resolution (800 × 600 pixels) LCD

Equal performance dual channel output



Rich analog and digital modulation



Rich sweep function



Build-in 152 arbitrary waveforms



Performance Specifications

Model	XDG3252	XDG3202	XDG3162	XDG3102	XDG3082
Channel			dual		
Frequency Output	250MHz	200MHz	160MHz	100MHz	80MHz
Sample Rate			1.25GSa/s		
Vertical Resolution			14 bits		
Waveform					
Standard Waveform	Sine, Square, Pulse, Ramp, Noise, and Harmonic				
Arbitrary Waveform	Exponential Rise, Exponential Fall, Sin(x)/x, Step Wave, and others, total 152 built-in waveforms, and user-defined arbitrary waveform				
Frequency (resolution 1μHz)					
Sine	1 μ Hz - 250MHz	1 μ Hz - 200MHz	1 μ Hz - 160MHz	1 μ Hz - 100MHz	1 μ Hz - 80MHz
Square	1 μ Hz - 50MHz	1 μ Hz - 50MHz	1 μ Hz - 50MHz	1 μ Hz - 40MHz	1 μ Hz - 30MHz
Pulse	1 μ Hz - 25MHz	1 μ Hz - 25MHz	1 μ Hz - 25MHz	1 μ Hz - 25MHz	1 μ Hz - 25MHz
Ramp				1 μ Hz - 5MHz	
Noise				120MHz (-3dB, type)	
Arb				1 μ Hz - 50MHz	
Amplitude					
Amplitude (50 Ω)	1mVpp - 10Vpp (\leq 40MHz), 1mVpp - 5Vpp (\leq 80MHz) 1mVpp - 2.5Vpp (\leq 120MHz), 1mVpp - 1Vpp (\leq 250MHz)				
Amplitude(high impedance)	2mVpp - 20Vpp (\leq 40MHz), 2mVpp - 10Vpp (\leq 80MHz) 2mVpp - 5Vpp (\leq 120MHz), 2mVpp - 2Vpp (\leq 250MHz)				
Resolution	1mV or 4digits				
DC Offset Range (AC+DC)	\pm 5V(50 Ω), \pm 10V (high impedance)				
DC Offset Range Resolution	1mV or 4digits				
Load Impedance	50 Ω type				
Arbitrary Waveform					
Wave Length	2 - 1M pts				
Frequency	50MHz				
Modulation					
Type	AM, FM, PM, PWM, FSK, 3FSK, 4FSK, PSK, OSK, ASK, BPSK, sweep, and burst				
Frequency	2 mHz - 100 kHz (AM, FM, PM, PWM), 2 mHz - 1MHz (FSK, 3FSK, 4FSK, PSK, OSK, ASK, BPSK),				
Frequency Counter					
Function	Frequency, Period, +Width, -Width, +Duty, and -Duty				
Frequency Range	100mHz - 200MHz				
Frequency Resolution	7 digits/s				
Input / Output					
Display	8 inch (800 x 600 pixels) TFT LCD				
Type	counter, external modulation input, external trigger input, external reference clock input / output				
Communication Interface	USB Host, USB Device, LAN				
Mechanical					
Dimension (WxHxD)	340 x 177 x 90 (mm)				
Device Weight	2.50 kg				

Specifications subject to change without prior notice.

Application

design and debug circuit function test education and training

Accessories

The accessories subject to final delivery.



Power Cord



CD Rom



User's Manual



USB Cable



Q9 Cable



- + Advanced DDS technology, upto 10MHz frequency output
- + 125MS/s sample rate, and 1µHz frequency resolution
- + Vertical Resolution : 14 bits, and 8K arb waveform length
- + Comprehensive waveform output : 5 basic waveforms, and 45 built-in arbitrary waveforms
- + Comprehensive modulation functions : AM, FM, PM, FSK, Sweep, and Burst
- + SCPI, and LabVIEW supported
- + 4" high resolution (480 x 320 pixels) LCD
- + could work with OWON SDS Series DSO smoothly

+ Performance Specifications

Model	AG051	AG051F	AG1011	AG1011F
Channel		single + trigger		
Frequency Output	5MHz		10MHz	
Sample Rate		125MS/s		
Vertical Resolution		14 bits		
Waveform				
Standard Waveform	Sine, Square, Pulse, Ramp, and Noise			
Arbitrary Waveform	Exponential Rise, Exponential Fall, Sin(x)/x, Step Wave, and others, total 45 built-in waveforms, and user-defined arbitrary waveform			
Frequency (resolution 1µHz)				
Sine	1µHz - 5MHz		1µHz - 10MHz	
Square		1µHz - 5MHz		
Pulse		1µHz - 5MHz		
Ramp		1µHz - 1MHz		
Noise	5MHz (-3dB) (typical)			
Arbitrary Waveform	1µHz - 5MHz			
Amplitude				
Amplitude	1m Vpp - 12.5 Vpp (50Ω), 1m Vpp - 25 Vpp (high impedance)			
Resolution	1m Vpp, or 4 digits			
DC Offset Range (AD+DC)	±6.25V (50Ω), ±12.5V (high impedance)			
DC Offset Range Resolution	1mV, or 4 digits			
Load Impedance	50Ω (typical)			
Square/Pulse				
Rise Time	<12ns			
Jitter (RMS) Typical	1ns ±30ppm			
Duty Cycle	20% ~ 80% (< 1 MHz), 50% (1 MHz ~ 5 MHz)			

Model	AG051	AG051F	AG1011	AG1011F
Arbitrary Waveform				
Wave Length				2 pts to 8K pts
Sample Rate				125MS/s
Vertical Resolution				14 bits
Non-volatile Memory				64M byte
Modulation				
Modulation Waveform	/	AM, FM, PM, FSK, Sweep, and Burst	/	AM, FM, PM, FSK, Sweep, and Burst
Modulation Frequency	/	2mHz to 20.00KHz (FSK 2mHz - 100KHz)	/	2mHz to 20.00KHz (FSK 2mHz - 100KHz)
Power Amplifier Module (optional)				
Input Impedance	50 kΩ	Output Impedance	<2 Ω	
Max Input Voltage	2.2Vpp	Gain	X10	
Max Output Voltage	22Vpp	Offset	<7%	
Output Slew Rate	10V/us	Bandwidth (at full power)	DC 100kHz	
Max Output Power	10W			
Input / Output				
Display	4 inch (480 x 320 pixels) LCD			
Type	external reference clock input	external modulation input, external trigger input, external reference clock input	external reference clock input	external modulation input, external trigger input, external reference clock input
Communication Interface	USB device			
Mechanical				
Dimension (W x H x D)	235 x 110 x 295 (mm)			
Device Weight	3.00 kg			

Specifications subject to change without prior notice.

+ Application

design and debug circuit function test education and training

+ Accessories


The accessories subject to final delivery.



Power Cord



CD Rom



Manual



USB Cable



Q9 Cable

Dual-channel Arbitrary Waveform Generator



- + Advanced DDS technology, max 60MHz frequency output
- + Up to 300MS/s sample rate, and 1µHz frequency resolution
- + Vertical Resolution : 14 bits, up to 1M arb waveform length
- + Comprehensive waveform output : 5 basic waveforms, and 45 built-in arbitrary waveforms
- + Comprehensive modulation functions : AM, FM, PM, FSK, PWM, Sweep, and Burst
- + High-accuracy frequency counter integrated, supported range 100mHz - 200MHz
- + SCPI, and LabVIEW supported
- + 4 inch high resolution (480 x 320 pixels) LCD
- + could work with OWON SDS Series DSO smoothly

+ Performance Specifications

Model	AG1012	AG1012F	AG1022	AG1022F	AG2052F	AG2062F
Channel	dual					
Frequency Output	10MHz		25MHz		50MHz	60MHz
Sample Rate		125MS/s			300MS/s	
Vertical Resolution				14 bits		

Waveform

Standard Waveform	Sine, Square, Pulse, Ramp, DC, and Noise			
Arbitrary Waveform	Exponential Rise, Exponential Fall, Sin(x)/x, Step Wave, and others, total 45 built-in waveforms, and user-defined arbitrary waveform			

Frequency (resolution 1µHz)

Sine	1µHz - 10MHz	1µHz - 25MHz	1µHz - 50MHz	1µHz - 60MHz
Square		1µHz - 5MHz	1µHz - 25MHz	1µHz - 30MHz
Pulse		1µHz - 5MHz	1µHz - 10MHz	1µHz - 15MHz
Ramp			1µHz - 1MHz	
Noise			25MHz (-3dB) (typical)	
Arbitrary Waveform			1µHz - 10MHz	

Amplitude

Amplitude	1m Vpp - 10 Vpp (50Ω), 1m Vpp - 20 Vpp (high impedance)			
Resolution	1m Vpp or 4 digits			
DC Offset Range (AD+DC)	±5V (50Ω), ±10V (high impedance)			
DC Offset Range Resolution	1mV or 4 digits			
Load Impedance	50Ω (typical)			

Square/Pulse

Rise Time	< 12ns			
Jitter (RMS) Typical	1ns ±30ppm		300 ps + 100 ppm of period	
Duty Cycle	20% ~ 80% (< 1 MHz), 50% (1 MHz ~ 5 MHz)		20% ~ 80% (< 1 MHz), 50% (≥ 1 MHz)	

Model	AG1012	AG1022	AG1012F	AG1022F	AG2052F	AG2062F
Arbitrary Waveform						
Wave Length			2 pts to 8K pts		2 pts to 1M pts	
Non-volatile Memory				64M byte		
Modulation						
Modulation Waveform	/		AM, FM, PM, FSK, Sweep, and Burst	AM, FM, PM, FSK, PWM, Sweep, and Burst		
Modulation Frequency	/			2mHz to 20.00KHz (FSK 2mHz - 100KHz)		
Frequency Counter						
Function	/		Frequency Period, +Width, -Width, +Duty, and -Duty			
Frequency Range	/			100mHz - 200MHz		
Frequency Resolution	/				6 digits	
Power Amplifier Module (optional)						
Input Impedance		50 kΩ	Output Impedance		<2 Ω	
Max Input Voltage		2.2Vpp	Gain		X10	
Max Output Voltage		22Vpp	Offset		<7%	
Output Slew Rate		10V/us	Bandwidth (at full power)		DC 100kHz	
Max Output Power		10W				
Input / Output						
Display			4 inch (480 x 320 pixels) LCD			
Type	external reference clock input / output		counter external modulation input, external trigger input, external reference clock input / output			
Communication Interface			USB host, and USB device, RS232 (option)			
Mechanical						
Dimension (W x H x D)			235 x 110 x 295 (mm)			
Device Weight			3.00 kg			



Specifications subject to change without prior notice.

+ Application

design and debug circuit function test education and training

+ Accessories

The accessories subject to final delivery.



Power Cord

CD Rom

User's Manual

USB Cable

Q9 Cable



- + Advanced DDS technology, max 150MHz frequency output
- + Up to 400MS/s sample rate, and 1µHz frequency resolution
- + Vertical Resolution : 14 bits, up to 1M arb waveform length
- + Comprehensive waveform output : 5 basic waveforms, and 45 built-in arbitrary waveforms
- + Comprehensive modulation functions : AM, FM, PM, FSK, PWM, Sweep, and Burst
- + SCPI, and LabVIEW supported
- + 4 inch high resolution (480 x 320 pixels) LCD

+ Performance Specifications

Model	AG4081	AG4101	AG4121	AG4151
Channel	single + trigger			
Frequency Output	80MHz	100MHz	120MHz	150MHz
Sample Rate	400MS/s			
Vertical Resolution	14 bits			
Waveform				
Standard Waveform	Sine, Square, Pulse, Ramp, and Noise			
Arbitrary Waveform	Exponential Rise, Exponential Fall, Sin(x)/x, Step Wave, and others, total 45 built-in waveforms, and user-defined arbitrary waveform			
Frequency (resolution 1µHz)				
Sine	1µHz - 80MHz	1µHz - 100MHz	1µHz - 120MHz	1µHz - 150MHz
Square	1µHz - 40MHz		1µHz - 50MHz	
Pulse	1µHz - 20MHz		1µHz - 25MHz	
Ramp		1µHz - 1MHz		
Noise		50MHz (-3dB) (typical)		
Arbitrary Waveform		1µHz - 10MHz		
Amplitude				
Amplitude	10m Vpp - 10 Vpp (50Ω), 20m Vpp - 20 Vpp (high impedance)			
Resolution	1m Vpp or 4 digits			
DC Offset Range (AD+DC)	±5V (50Ω), ±10V (high impedance)			
DC Offset Range Resolution	1mV or 4 digits			
Load Impedance	50Ω (typical)			
Square/Pulse				
Rise Time	< 12ns			
Jitter (RMS) Typical	300 ps + 100 ppm of period			
Duty Cycle	20% ~ 80% (< 1 MHz), 50% (≥ 1 MHz)			

Model	AG4081	AG4101	AG4121	AG4151
Arbitrary Waveform				
Wave Length				2 pts to 1M pts
Sample Rate				200MS/s
Vertical Resolution				14 bits
Non-volatile Memory				64M byte
Modulation				
Modulation Waveform				AM, FM, PM, FSK, PWM, Sweep, and Burst
Modulation Frequency				2mHz to 20.00KHz (FSK 2mHz - 100KHz)
Input / Output				
Display				4 inch (480 x 320 pixels) LCD
Type				external modulation input, external trigger input / output, external reference clock input / output
Communication Interface				USB host, USB device, RS232, and LAN
Mechanical				
Dimension (W x H x D)				235 x 110 x 295 (mm)
Device Weight				3.00 kg

Specifications subject to change without prior notice.

+ Application

design and debug circuit function test education and training

+ Accessories

The accessories subject to final delivery.



Power Cord CD Rom Manual USB Cable Q9 Cable

SP Series

DC Power Supply



- + Small body for easy carry
- + 150W maximum output power
- + High setting resolution : 10mV / 10mA
- + low ripples / low noise
- + over-voltage / over-current protection
- + CV/CC output model
- + 3.7 inch TFT LCD
- + Support RS232 digital communication
- + Support SCPI and Labview




Large LCD Display





Conventional display example*

Supports 10mV/10mA Resolution up to Full Load.

029.989
VDC

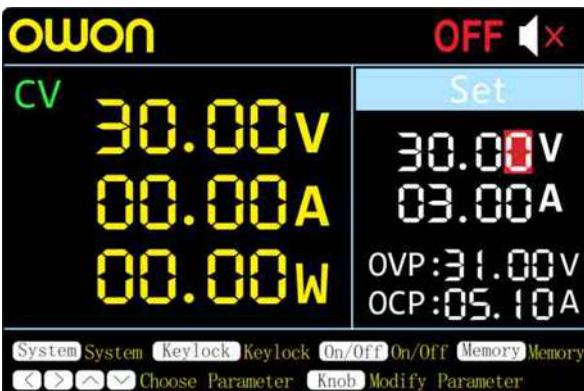

Save up to 5 sets of parameters in memory for easy recall.

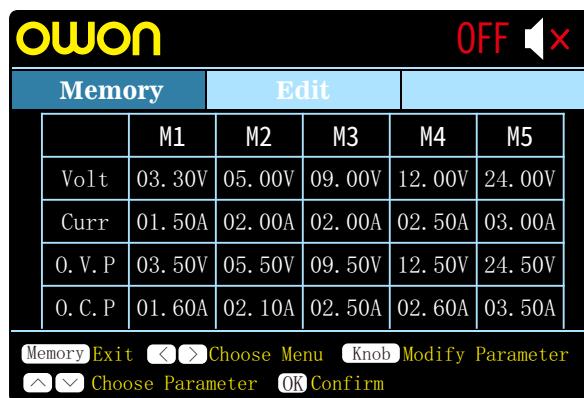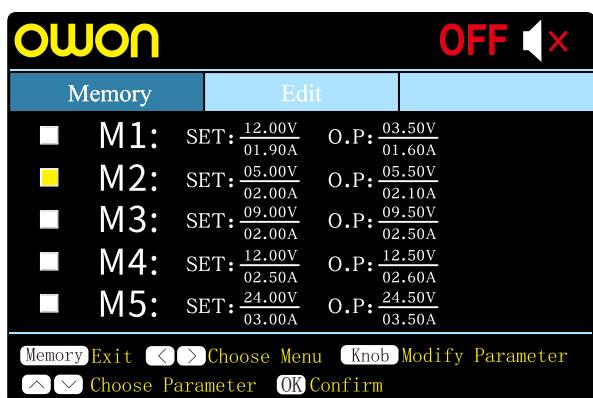

+ Performance Specifications

Model	SP3051	
Channel	Single Channel Output	
Total Output Power	150W	
Channel Output	0 - 30V / 0 - 5A × 1-CH	
Display	3.7 inch color LCD display	
Dimension	117mm(L) × 194mm (H) × 295mm (D)	
Weight	Approx. 2.30 kg	
Interface	RS232	

The instrument must be operated continuously for more than 30 minutes at the specified temperature to ensure the following parameters.

Model	SP3051	
Rated Output (0°C-40°C)	Voltage	0 - 30V
	Current	5A
Load Regulation	Voltage	≤30mV
	Current	≤50mA
Line Resolution	Voltage	≤10mA
	Current	≤20mA
Setting Resolution	Voltage	10mV
	Current	10mA
Readback Resolution	Voltage	10mV
	Current	10mA
Settings Accuracy (within 12 months) (25°C±5°C)	Voltage	≤0.3% + 10mV
	Current	≤0.3% + 20mA
Readback Accuracy (25°C±5°C)	Voltage	≤0.3% + 10mV
	Current	≤0.3% + 20mA
Ripple/Noise (20Hz-20MHz)	Voltage (Vp-p)	≤30mVp-p
	Voltage (rms)	≤3mVrms
	Current (rms)	≤30mA rms
Output Temperature (0°C-40°C)	Voltage	≤0.3% + 10mV
	Current	≤0.3% + 20mA
Readback Temperature Coefficient	Voltage	≤0.3% + 10mV
	Current	≤0.3% + 20mA
Response Time	≤1.0ms	
Storage	5 groups of data	
Working Temperature	0-40°C	

Specifications subject to change without prior notice.

+ Application

Military R&D
Automotive Circuit Testing
Quality Inspection
Education and Technical Training
experiment Monitoring battery charging curve

Circuit Functional Testing
Electronic component testing and aging

+ Accessories

The accessories subject to final delivery.



Power Cord



Manual



Fuse



Test Leads (optional)



RS232 to USB Module (optional)

P4000 Series

Single Channel Linear DC Power Supply



- + Small body for easy carry
- + 180W maximum output power
- + High resolution: 1mV / 1mA
- + Low ripple/noise
- + Over voltage/over current protection
- + Multi-directional cooling system with smart fan
- + 3.7 inch TFT LCD display
- + Support RS232 digital communication
- + Support SCPI and Labview




0.01% Power and Load Regulation

029.995
VDC

029.989
VDC



Save up to 5 sets of parameters in memory for easy recall.

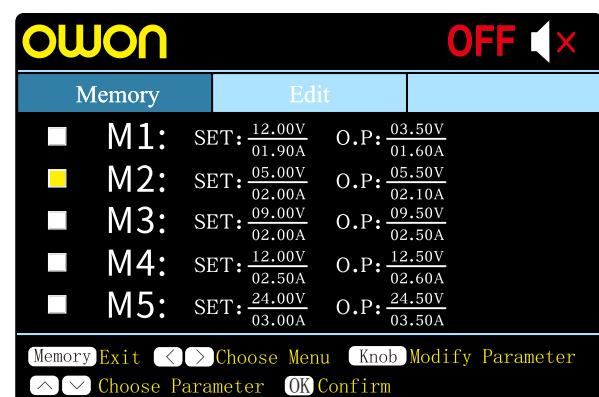

Performance Specifications

Model	P4305	P4603
Channel	Single Channel Output	
Total Output Power	150W	180W
Channel Output	0 - 30V / 0 - 5A × 1-CH	0 - 60V / 0 - 3A × 1-CH
Display	3.7 inch color LCD display	
Dimension	117mm(L) × 194mm (H) × 295mm (D)	
Weight	Approx. 5.60 kg	Approx. 5.80 kg
Interface	Rs232, USB device(optional)	

The instrument must be operated continuously for more than 30 minutes at the specified temperature to ensure the following parameters.

Model	P4305	P4603
Rated Output (0°C-40°C)	Voltage	0 - 30V
	Current	5A
Load Regulation	Voltage	≤0.01% + 3mV
	Current	≤0.01% + 3mA
Power Regulation	Voltage	≤0.01% + 3mV
	Current	≤0.01% + 3mA
Setting Resolution	Voltage	1mV
	Current	1mA
Readback Resolution	Voltage	1mV
	Current	1mA
Setpoint Accuracy (within 12 months) (25°C±5°C)	Voltage	≤0.03% + 10mV
	Current	≤0.1% + 5mA
Readback Accuracy (25°C±5°C)	Voltage	≤0.03% + 10mV
	Current	≤0.1% + 5mA
Ripple/Noise (20Hz-20MHz)	Voltage (Vp-p)	≤4mVp-p
	Voltage (rms)	≤1mVrms
	Current (rms)	≤4mA rms
Output Temperature (0°C-40°C)	Voltage	≤0.03% + 10mV
	Current	≤0.1% + 5mA
Readback Temperature Coefficient	Voltage	≤0.03% + 10mV
	Current	≤0.1% + 5mA
Response Time		100 μs
Storage		5 groups of data
Working Temperature		0-40°C

Specifications subject to change without prior notice.

Application

Military R&D
Automotive Circuit Testing
Quality Inspection
Education and Technical Training
experiment Monitoring battery charging curve

Circuit Functional Testing
Electronic component testing and aging

Accessories

The accessories subject to final delivery.



Power Cord



Manual



Fuse



RS232



Test Leads (optional)



RS232 to USB Module (optional)

ODP Series

Programmable DC Power Supply



**Dual Output**

- + Two independent controllable channels + sense
- + Max output resolution : 1mV / 1mA
- + Low ripples / low noise
- + Up to 100 group timers
- + Over-voltage / Over-current protection
- + Data-logging function: could record the read back voltage and current, display recorded data in chart

- + 4 inch high resolution (480 x 320 pixels) LCD
- + Multi- CI: USB, RS232, and LAN
- + Auto-cooling system
- + SCPI, and LabVIEW supported

Creative Data Recording Function

to monitor the changing status of powering system, displaying recorded data in chart.

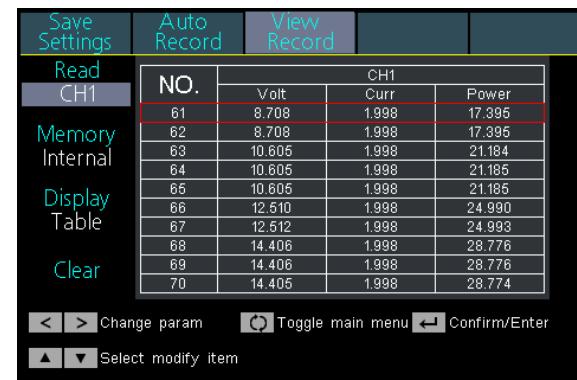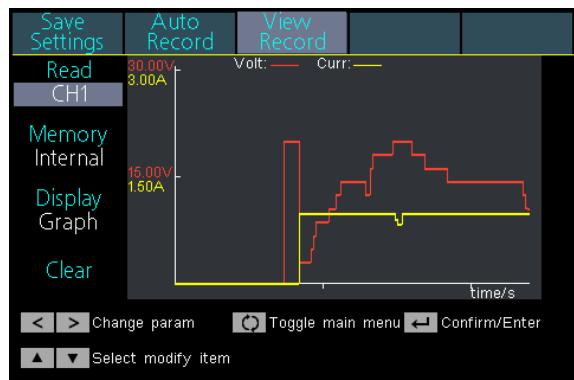

Model	ODP3122	ODP6062
Channel	2 (independent controllable channel) +sense	
Max Output Power	378W	
Output Range	0 - 30V / 12A, 0 - 6V / 3A	0 - 60V / 3A, 0 - 6V / 3A

Display

Model	ODP3122	ODP6062
LCD Type	4 inch color LCD	
Display Resolution	480 x 320 pixels, 65536 colors	

Mechanical Specifications

Model	ODP3122	ODP6062
Dimension (W x H x D)	250 x 158 x 358 (mm)	
Device Weight	12.00 kg	

Performance Specifications

The specifications based upon the instrument having run for at least 30 minutes continuously, under the specified operating environment.

Model	ODP3122	ODP6062	all 2 models
Channel	CH 1	CH 1	CH 2
Output Ratings (0°C - 40°C)	Voltage 0 - 30V Current 12A	Voltage 0 - 60V Current 6A	6V 3A
Load Regulation	Voltage ≤0.01% + 3mV Current ≤0.01% + 3mA		
Line Regulation	Voltage ≤0.01% + 3mV Current ≤0.01% + 3mA		
Settings Resolution	Voltage 1mV Current 1mA		
Read Back Resolution	Voltage 1mV Current 1mA		
Settings Accuracy (25°C ± 5°C) (within 12 months)	Voltage ≤0.03% + 10mV Current ≤0.1% + 8mA	≤0.1% + 5mA	≤0.1% + 5mA
Read Back Accuracy (25°C ± 5°C)	Voltage ≤0.03% + 10mV Current ≤0.1% + 8mA	≤0.1% + 5mA	≤0.1% + 5mA
Noise and Ripple (20Hz - 20MHz)	Voltage (Vp-p) ≤2mVp-p Voltage (rms) ≤300uVrms Current (rms) ≤3mArms	≤3mVp-p ≤1mVrms	≤4mAmps
Output Temperature Coefficient (0°C - 40°C)	Voltage ≤0.03% + 10mV Current ≤0.1% + 5mA		
Read Back Temperature Coefficient	Voltage ≤0.03% + 10mV Current ≤0.1% + 5mA		
Programmable Output	Storage 100 groups Time Setting second		
Data Recording	10 K groups (of voltage, current and power data) recording capacity		
Working Temperature	0 - 40°C		
Communication Interface	USB, RS232, and LAN		

Specifications subject to change without prior notice.

ApplicationR&D laboratory
automobile, and electronic circuit testQC test
education / teaching experimentation**Accessories**

The accessories subject to final delivery.



Power Cord CD Rom Manual USB Cable Fuse Test Leads (optional)

ODP Series

Programmable DC Power Supply

**Triple Output**



- + Three independent controllable channels
- + Max output resolution : 1mV / 1mA
- + Low ripples / low noise
- + Up to 100 group timers

- + Multi- working mode : individual, parallel, and series
- + Over-voltage / Over-current protection
- + Data-logging function: could record the read back voltage and current, display recorded data in chart

- + 4 inch high resolution (480 x 320 pixels) LCD
- + Multi- CI: USB, RS232, and LAN
- + Auto-cooling system
- + SCPI, and LabVIEW supported

Creative Data Recording Function

to monitor the changing status of powering system, displaying recorded data in chart.

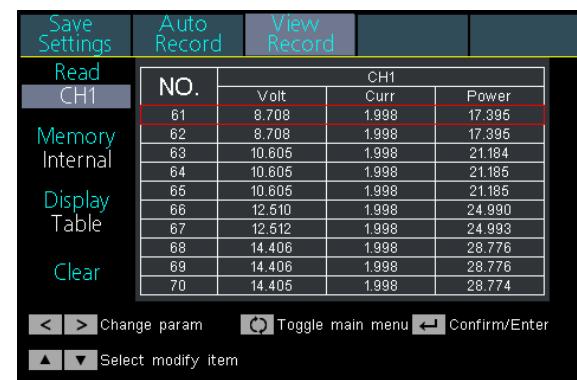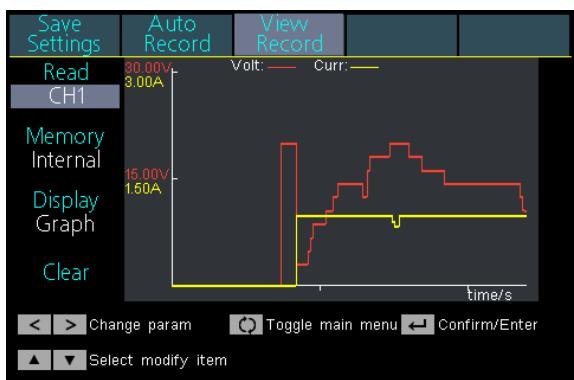

Model	ODP3033	ODP3063	ODP6033
Channel	3 (independent controllable channel)		
Max Output Power	198W	378W	378W
Output Range	0 - 30V / 3A x 2-CH, 0 - 6V / 3A	0 - 30V / 6A x 2-CH, 0 - 6V / 3A	0 - 60V / 3A x 2-CH, 0 - 6V / 3A

Display

Model	ODP3033	ODP3063	ODP6033
LCD Type	4 inch color LCD		
Display Resolution	480 x 320 pixels, 65536 colors		

Mechanical Specifications

Model	ODP3033	ODP3063	ODP6033
Dimension (W x H x D)	250 x 158 x 358 (mm)		
Device Weight	9.80 kg	12.00 kg	

Performance Specifications

The specifications based upon the instrument having run for at least 30 minutes continuously, under the specified operating environment.

Model	ODP3033	ODP3063	ODP6033	all 3 models
Channel	CH 1	CH 2	CH 1	CH 2
Output Ratings (0°C - 40°C)	Voltage	0 - 30V	0 - 30V	0 - 60V
	Current	3A	6A	3A
Load Regulation	Voltage			≤0.01% + 3mV
	Current			≤0.01% + 3mA
Line Regulation	Voltage			≤0.01% + 3mV
	Current			≤0.01% + 3mA
Settings Resolution	Voltage			1mV
	Current			1mA
Read Back Resolution	Voltage			1mV
	Current			1mA
Settings Accuracy (25°C ± 5°C) (within 12 months)	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 8mA
Read Back Accuracy (25°C ± 5°C)	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 8mA
Noise and Ripple (20Hz - 20MHz)	Voltage (Vp-p)			≤4mVp-p
	Voltage (rms)			≤1mVrms
	Current (rms)			≤5mArms
Output Temperature Coefficient (0°C - 40°C)	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 5mA
Read Back Temperature Coefficient	Voltage			≤0.03% + 10mV
	Current			≤0.1% + 5mA
Parallel Settings Accuracy	Voltage			≤0.02% + 5mV
	Current			≤0.1% + 30mA
Programmable Output	Storage			100 groups
	Time Setting			second
Data Recording				10 K groups (of voltage, current and power data) recording capacity
Working Temperature				0 - 40°C
Communication Interface				USB, RS232, and LAN

Specifications subject to change without prior notice.

Application

R&D laboratory

QC test

industrial automation test
education / teaching experimentation**Accessories**

The accessories subject to final delivery.



Power Cord




CD Rom



Manual



USB Cable



Fuse



Test Leads (optional)

ODP Series

Programmable DC Power Supply



[ODP3031]



[ODP3032]



- + ODP3032: two independent controllable channels; ODP3031 : one controllable channel
- + Max output resolution : 1mV / 1mA
- + Low ripples / low noise : <300 µVRms / 2 mVpp
- + Up to 100 group timers
- + Up to 10 group preset system configurations
- + Over-voltage / Over-current protection
- + Auto-cooling system
- + 3.9 inch high resolution (480 x 320 pixels) LCD
- + USB2.0, and RS232 serial port digital communication supported
- + SCPI, and LabVIEW supported

+ Performance Specifications

The specifications based upon the instrument having run for at least 30 minutes continuously, under the specified operating environment.

Model	ODP3031		ODP3032	
Channel	1	Fixed 3.3V / 5V	2 (independent)	Fixed 5V
DC Output Rating	Voltage	0 - 30V	3.3V / 5V	0- 30V (Independent / Parallel) 0 - 60V (Series) -30V - 30V (Plus-minus)
	Current	0 - 3A	3A	0 - 3A (Independent / Series / Plus-minus), 0 - 6A (Parallel)
Line Regulation	CV	≤0.01% + 3mV	≤3mV	≤0.01% + 3mV
	CC	≤0.1% + 3mA	/	≤0.1% + 3mA
Load Regulation	CV	≤0.01% + 3mV	≤0.1% + 3mV	≤0.01% + 3mV
	CC	≤0.2% + 3mA	/	≤0.2% + 3mA
Noise and Ripple (20Hz - 7MHz)	CV	≤300 µVRms / 2 mVpp		≤300 µVRms / 2 mVpp
	CC	≤3mA rms	/	≤3mA rms
Settings Resolution	Voltage	1mV	/	1mV
	Current	1mA	/	1mA
Settings Accuracy (25°C ± 5°C)	Voltage	≤0.05% + 3mV	/	≤0.05% + 3mV
	Current	≤0.1% + 3mA	/	≤0.1% + 3mA
Read Back Resolution	Voltage	1mV (< 10V), 10mV (≥ 10V)	/	1mV (< 10V), 10mV (≥ 10V)
	Current	1mA	/	1mA
Read Back Accuracy (25°C ± 5°C)	Voltage	≤0.05% + 3 digits	/	≤0.05% + 3 digits
	Current	≤0.1% + 3 digits	/	≤0.1% + 3 digits
Communication Interface				
USB Host, USB Device and RS232				

Specifications subject to change without prior notice.

+ Display

Model	ODP3031	ODP3032
Display Type	3.9 inch colored LCD	
Display Resolution	480 x 320 pixels	
Display Color	65536 colors	

+ Mechanical Specifications

Model	ODP3031	ODP3032
Dimension (W x H x D)	250 x 158 x 358 (mm)	
Device Weight	7.00 kg	10.50 kg

+ Application

general detection in R&D laboratory QC test industrial automation test
 automobile and electronic circuit test power-supplying education / teaching experimentation
 electronic components test, aging test to monitor the real-time status of power system via remote control
 to monitor battery charging curve

+ Accessories

The accessories subject to final delivery.



Power Cord CD Rom User's Manual USB Cable Fuse Test Leads (optional)

XDM3041


Bench-type Digital Multimeter



- + 4 inch 480 x 320 pixels high resolution LCD
- + resolutions up to 4 5/6 digits
- + reading rates up to 150 readings/s
- + true RMS AC voltage / current measurement
- + dual line display supported
- + the change trend analysis accessible via special chart mode
- + SCPI supported - remote control, and data-sharing possible via LAN, USB, RS232 port, and WiFi*
- * WiFi module is optional
- + multi- IO interface: USB Device / Host, RS232, LAN, and ext. trigger input

Data-logger Mode

during recording the measurement value, possible to set the logging duration (min. 5ms), and length, then get access to chart or table result

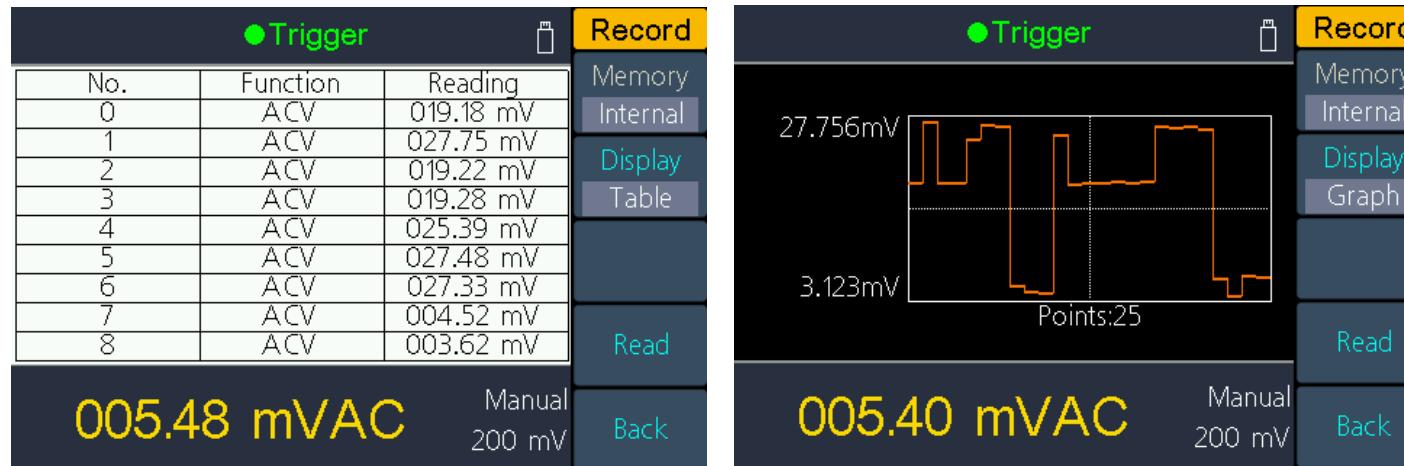**+ Performance Specifications**

XDM3041	Measurement Range	Frequency Range	Accuracy: 1 Year ± (% of reading + % of range)
DC Voltage	600mV, 6V, 60V, 600V, 1000V	/	0.02±0.01
True RMS AC Voltage	600mV, 6V, 60V, 600V, 750V	20Hz - 50Hz	2 + 0.10
		50Hz - 20kHz	0.2 + 0.06
		20kHz - 50kHz	1.0 + 0.05
		50kHz - 100 kHz	3.0 + 0.08
DC Current	600.00 μA	/	0.06 + 0.02
	6.0000 mA		0.06 + 0.02
	60.000 mA		0.1 + 0.05
	600.00 mA		0.2 + 0.02
	6.000 A		0.2 + 0.05
	10.0000 A		0.250 + 0.05
True RMS AC Current	60.000 mA, 600.00 mA, 6.0000 A, 10.000 A	20Hz - 45Hz	2 + 0.10
		45Hz - 2kHz	0.50 + 0.10
		2kHz - 10kHz	2.50 + 0.20

XDM3041	Measurement Range	Frequency Range	Accuracy: 1 Year ± (% of reading + % of range)
Resistance	600.00 Ω	/	0.040 + 0.01
	6.0000 kΩ		0.030 + 0.01
	60.000 kΩ		0.030 + 0.01
	600.00 kΩ		0.040 + 0.01
	6.0000 MΩ		0.120 + 0.03
	60.000 MΩ		0.90 + 0.03
	100.00 MΩ		1.75 + 0.03
Diode Test	3.0000 V	/	0.5 + 0.01
Continuity	1000Ω	/	0.5 + 0.01
Frequency Period	20 Hz - 2 kHz	600 mV - 750 V	0.01 + 0.003
	2 kHz - 20 kHz		0.01 + 0.003
	20 kHz - 200 kHz		0.01 + 0.003
	200 kHz - 1 MHz		0.01 + 0.006
	60 mA - 10 A	20Hz-2kHz	0.01 + 0.003
	2 kHz - 10 kHz	2 kHz - 10 kHz	0.01 + 0.003
Test Current			
Capacitance	2.000 nF	200 nA	3 + 1.0
	20.00 nF	200 nA	1 + 0.5
	200.0 nF	2 μA	1 + 0.5
	2.000 μF	10 μA	1 + 0.5
	200 μF	100 μA	1 + 0.5
	10000 μF	1 mA	2 + 0.5
Temperature	temperature sensors under 2 categories supported - thermocouple (ITS-90 conversion between B / E / J / K / N / R / S / T type), and thermal resistance (RTD sensor conversion between Pt100 and Pt385 type)		
Miscellaneous	barometer bar charts, trend chart Vavg, Vmax, Vmin standard deviation DB / DBm Pass / Fail		
Data-logger Function			
Logging Duration	5ms - 1000s		
Logging Length	1M points		
General			
Dimension (W x H x D)	235 x 110 x 295 (mm)		
Device Weight	3.00 kg		

Specifications subject to change without prior notice.

+ Application

electronic circuit debugging education and training	circuit testing automobile maintenance and testing	design and manufacture
--	---	------------------------

+ Accessories

The accessories subject to final delivery.

Power Cord	Manual	USB Cable	Fuse	Multimeter Lead	Alligator Clip

XDM3051


Bench-type Digital Multimeter



- + 4 inch 480 x 320 pixels high resolution LCD
- + resolutions up to 5 1/2 digits
- + reading rates up to 150 readings/s
- + true RMS AC voltage / current measurement
- + dual line display supported
- + the change trend analysis accessible via special chart mode
- + SCPI supported - remote control, and data-sharing possible via LAN, USB, RS232 port, and WiFi*
- * WiFi module is optional
- + multi- IO interface: USB Device / Host, RS232, LAN, and ext. trigger input

Data-logger Mode

during recording the measurement value, possible to set the logging duration (min. 5ms), and length, then get access to chart or table result

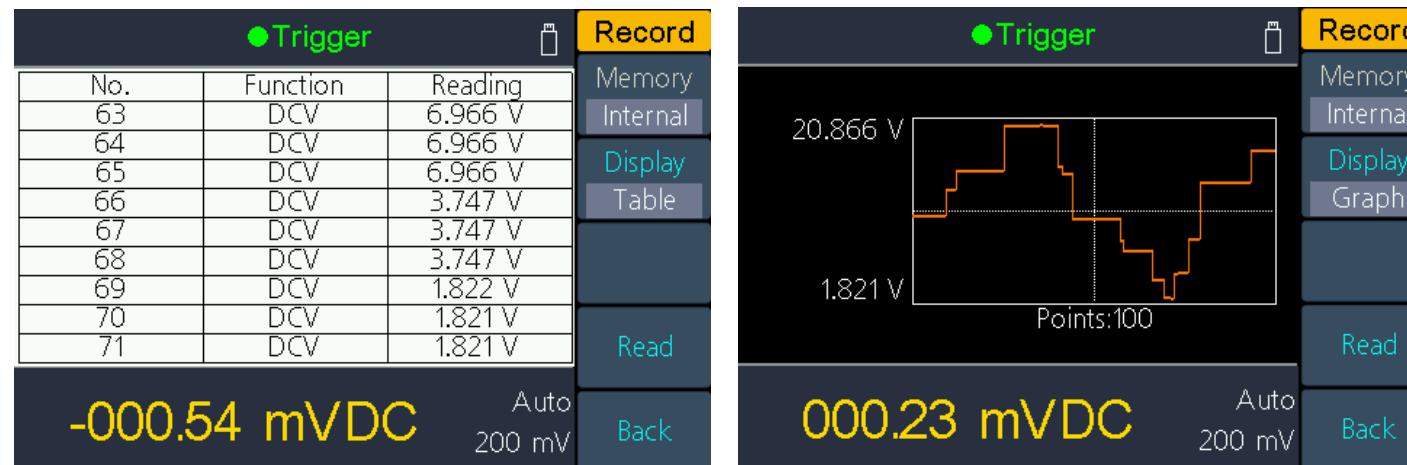**+ Performance Specifications**

XDM3051	Measurement Range	Frequency Range	Accuracy: 1 Year ± (% of reading + % of range)
DC Voltage	200mV, 2V, 20V, 200V, 1000V	/	0.015 ± 0.004
True RMS AC Voltage	200mV, 2V, 20V, 200V, 750V	20Hz - 45Hz	1.5 + 0.10
		45Hz - 20kHz	0.2 + 0.05
		20kHz - 50kHz	1.0 + 0.05
		50kHz - 100 kHz	3.0 + 0.05
DC Current	200.000 μA	/	0.055 + 0.005
	2.00000 mA		0.055 + 0.005
	20.0000 mA		0.095 + 0.020
	200.000 mA		0.070 + 0.008
	2.00000 A		0.170 + 0.020
	10.0000 A		0.250 + 0.010
True RMS AC Current	20.0000 mA, 200.000 mA 2.00000 A, 10.0000 A	20Hz - 45Hz	1.5 + 0.10
		45Hz - 2kHz	0.50 + 0.10
		2kHz - 10kHz	2.50 + 0.20

XDM3051	Measurement Range	Frequency Range	Accuracy: 1 Year ± (% of reading + % of range)
Resistance	200.000 Ω	/	0.030 + 0.005
	2.00000 kΩ		0.020 + 0.003
	20.0000 kΩ		0.020 + 0.003
	200.000 kΩ		0.020 + 0.003
	2.00000 MΩ		0.040 + 0.004
	10.0000 MΩ		0.250 + 0.003
	100.000 MΩ		1.75 + 0.004
Diode Test	2.0000 V	/	0.05 + 0.01
Continuity	2000Ω	/	0.05+0.01
Frequency Period	20 Hz - 2 kHz	200 mV - 750 V	0.01 + 0.003
	2 kHz - 20 kHz		0.01 + 0.003
	20 kHz - 200 kHz		0.01 + 0.003
	200 kHz - 1 MHz		0.01 + 0.006
	20Hz-2kHz	20 mA - 10 A	0.01 + 0.003
	2 kHz - 10 kHz		0.01 + 0.003
Test Current			
Capacitance	2.000 nF	200 nA	3 + 1.0
	20.00 nF	200 nA	1 + 0.5
	200.0 nF	2 μA	1 + 0.5
	2.000 μF	10 μA	1 + 0.5
	200 μF	100 μA	1 + 0.5
	10000 μF	1 mA	2 + 0.5
Temperature	temperature sensors under 2 categories supported - thermocouple (ITS-90 conversion between B / E / J / K / N / R / S / T type), and thermal resistance (RTD sensor conversion between Pt100 and Pt385 type)		
Miscellaneous	barometer bar charts, trend chart Vavg, Vmax, Vmin standard deviation DB / DBm Pass / Fail		
Data-logger Function			
Logging Duration	5ms - 1000s		
Logging Length	1M points		
General			
Dimension (W x H x D)	235 x 110 x 295 (mm)		
Device Weight	3.00 kg		

Specifications subject to change without prior notice.

+ Application

electronic circuit debugging education and training	circuit testing automobile maintenance and testing	design and manufacture
--	---	------------------------

+ Accessories

The accessories subject to final delivery.

Power Cord	Manual	USB Cable	Fuse	Multimeter Lead	Alligator Clip Lead

BLUETOOTH DIGITAL MULTIMETER**OW16A/OW16B****on-site temperature test**

- + 3 5/6 bit resolution
- + Data Logger + Multimeter + Thermometer
- + BLE 4.0 wireless transmission, more stable, less power consumption
- + Chart and Diagram mode helps to analyze the data tendency
- + Support NCV non-contact voltage sense
- + True RMS test supported
- + Widely supported on Android, iOS and Windows
- + Build-in offline record function

NCV (Non-Contact Voltage) Sensor

When the non-contact voltage sensor is placed near to a live conductor, the instrument will beep and flash the row of LEDs at the top of the display depending on the AC voltage strength.

+ Performance Specifications


	Measurement Range		Resolution	Accuracy
DC Voltage	600.0mV / 6.000V / 60.00V / 600.0V		0.1mV	±(0.5%+2-dig)
	1000V		1V	±(0.8%+2-dig)
AC Voltage	600.0mV / 6.000V / 60.00V / 600.0V		0.1mV	±(0.8%+3-dig)
	750V		1V	±(1%+3-dig)
DC Current	60.00uA / 600.0μA (μA version)		0.01μA	±(0.8%+2-dig)
	60.00mA / 600.0mA		0.01mA	±(0.8%+2-dig)
	10.00A		0.01A	±(1.2%+3-dig)
AC Current	60.00uA / 600.0μA (μA version)		0.01μA	±(1%+3-dig)
	60.00mA / 600.0mA		0.01mA	±(1%+3-dig)
	10.00A		0.01A	±(1.5%+3-dig)
Resistance	600.0Ω / 6.000kΩ / 60.00kΩ / 600.0kΩ / 6.000MΩ		0.1Ω	±(0.8%+2-dig)
	60.00MΩ		0.01MΩ	±(2%+3-dig)
Capacitance	60.00nF / 600.0nF / 6.000μF / 60.00μF		0.01nF	±(2.5%+3-dig)
	600.0μF / 6.000mF / 60.00mF		0.1μF	±(3%+5-dig)
Frequency	9.999Hz / 99.99Hz / 999.9Hz / 9.999kHz / 99.99kHz / 999.9kHz / 9.999MHz		0.001Hz	±(0.8%+2-dig)
	0.1% - 99.9% (typical value: Vrms=1V, f=1kHz)		0.1%	±(1.2%+3-dig)
Duty Ratio	0.1% - 99.9% ($\geq 1\text{kHz}$)		0.1%	±(2.5%+3-dig)
	(-50°C) - (+400°C) (-58°F) - (+752°F)		1°C 1°F	±(2.5%+3-dig) ±(4.5%+5-dig)
Display	5999			
Frequency Response	40Hz - 1000Hz			
Shift Rate	3 times / s			

Bluetooth Module	√	Auto Ranging	√
True RMS	√	LCD Backlight	√
Diode Test	√	Auto- / Manual Range Selection	√
Input Protection		Input Protection	√
Auto Power-off	√	Input Impedance	$\geq 10\text{M}\Omega$
On-off Warning	√	Safety Compliance	600V, CATIII / 1000V, CATII
Low-battery Indicator	√	NCV	√
Data Hold	√	Dimension (W / H / D)	147mm x 74mm x 49mm (mm)
Relative Measurement	√	Weight (without package)	0.20 kg

Specifications subject to change without prior notice.

functioning as multimeter + datalogger

the measured data always updated, and auto-recorded to mobile device, saving labor to do on-site records;
the recording duration, and sampling duration could be customized, accessible in chart mode, facilitating comparison analysis between several multimeters

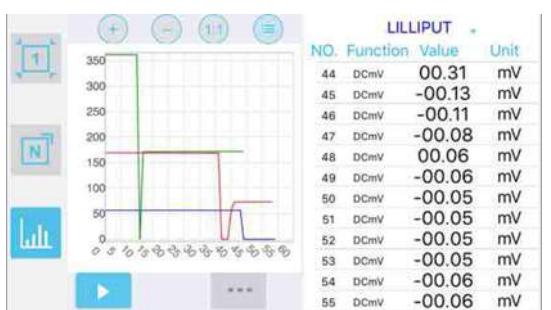**offline recording function - your process analyzer**

possible to record data into memory, but no need to leave mobile device on-site when data-processing, use mobile device to recall the saved data and offline recording

**+ Application**

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

+ Accessories

The accessories subject to final delivery.



Multimeter
Leads

K-type
Thermocouple

User's
Manual

Screwdriver
(optional)

Alligator Clip
(optional)

BLUETOOTH DIGITAL MULTIMETER

OW18A/OW18B



NCV (Non-Contact Voltage) Sensor

When the non-contact voltage sensor is placed near to a live conductor, the instrument will beep and flash the row of LEDs at the top of the display depending on the AC voltage strength.



- + 3 5/6 bit resolution
- + Data Logger + Multimeter + Thermometer
- + BLE 4.0 wireless transmission, more stable, less power consumption
- + Chart and Diagram mode helps to analyze the data tendency
- + Flashlight function lightens the darkness
- + Support NCV non-contact voltage sense
- + True RMS test supported
- + Widely supported on Android, iOS and Windows
- + Build-in offline record function


Large Display and Built-in Flashlight

The large backlit display and built-in high brightness flashlight is ideal for measurements in darkness.



functioning as multimeter + datalogger

the measured data always updated, and auto-recorded to mobile device, saving labor to do on-site records; the recording duration, and sampling duration could be customized, accessible in chart mode, facilitating comparison analysis between several multimeters

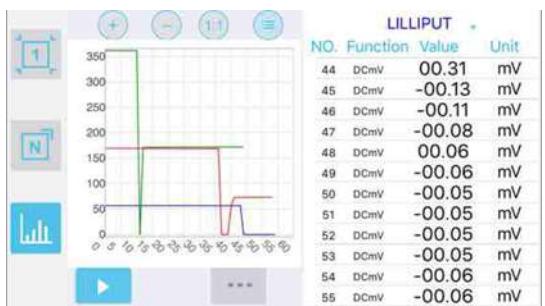

offline recording function - your process analyzer

possible to record data into memory, but no need to leave mobile device on-site when data-processing, use mobile device to recall the saved data and offline recording



+ Performance Specifications

	Measurement		Resolution	Accuracy
DC Voltage	mV	60.00mV / 600.0mV	0.01mV	±(0.5%+2-dig)
	V	600.0mV / 6.000V / 60.00V / 600.0V	0.1mV	±(0.5%+2-dig)
	1000V	1V	±(0.8%+2-dig)	
AC Voltage	mV	600.0mV (mV version)	0.01mV	±(0.8%+2-dig)
	V	6.000V / 60.00V / 600.0V	1mV	±(0.8%+2-dig)
	750V	1V	±(1%+3-dig)	
DC Current	µA	60.00µA / 600.0µA	0.01µA	±(0.8%+2-dig)
	mA	60.00mA / 600.0mA	0.01mA	±(0.8%+2-dig)
	A	20.00A	0.01A	±(1.2%+3-dig)
AC Current	µA	60.00µA / 600.0µA	0.01µA	±(1%+3-dig)
	mA	60.00mA / 600.0mA	0.01mA	±(1%+3-dig)
	A	20.00A	0.01A	±(1.5%+3-dig)
Resistance		600.0Ω / 6.000kΩ / 60.00kΩ / 600.0kΩ / 6.000MΩ	0.1Ω	±(0.8%+2-dig)
		60.00MΩ	0.01MΩ	±(2%+3-dig)
Capacitance		60.00nF / 600.0nF / 6.000µF / 60.00µF	0.01nF	±(2.5%+3-dig)
		600.0µF / 6.000mF / 60.00mF	0.1µF	±(3%+5-dig)
Frequency		9.999Hz / 99.99Hz / 999.9Hz / 9.999kHz / 99.99kHz / 999.9kHz / 9.999MHz	0.001Hz	±(0.8%+2-dig)
Duty Ratio		0.1% - 99.9% (typical value: Vrms=1V, f=1kHz)	0.1%	±(1.2%+3-dig)
		0.1% - 99.9% (≥1kHz)		±(2.5%+2-dig)
Temperature		(-50°C) - (+400°C)	1°C	±(2.5%+3-dig)
		(-58°F) - (+752°F)	1°F	±(4.5%+5-dig)
Display		5999		
Frequency Response		40Hz - 1000Hz		
Shift Rate		3 times / s		

Bluetooth Module	√	Auto Ranging	√
True RMS	√	LCD Backlight	√
Diode Test	√	Auto- / Manual Range Selection	√
Auto Power-off	√	Input Protection	√
On-off Warning	√	Input Impedance	≥10MΩ
Low-battery Indicator	√	Safety Compliance	600V, CAT IV / 1000V, CAT III
Data Hold	√	NCV	√
Relative Measurement	√	Dimension (W / H / D)	189.50 x 88.50 x 56 (mm)
Flashlight	√	Weight (without package)	0.30 kg

Specifications subject to change without prior notice.

+ Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing


design and manufacture

+ Accessories


The accessories subject to final delivery.



Multimeter
Leads



K-type
Thermocouple



User's
Manual



Screwdriver



9V Battery
(optional)



Alligator Clip
(optional)

DIGITAL MULTIMETER (3 5/6 digit)

OW18C



- + 3 5/6 bit digits
- + True RMS test supported
- + Support NCV non-contact voltage sense
- + multimeter + temperature meter + flashlight
- + LCD backlit function available

Measurement function rotary switch

Multiple measurement function, accurate scale, unique design, and excellent hand feeling



NCV (Non-Contact Voltage) Sensor

When the non-contact voltage sensor is placed near to a live conductor, the instrument will beep and flash the row of LEDs at the top of the display depending on the AC voltage strength.



Large Display and Built-in Flashlight

The large backlit display and built-in high brightness flashlight is ideal for measurements in darkness.



Performance Specifications

		Measurement	Resolution	Accuracy
DC Voltage (V)	mV	600mV	0.1 mV	$\pm(0.5\%+3\text{dig})$
	V	6V	1 mV	
		60V	10mV	
		600V	100mV	
		1000V	1 V	
AC Voltage (V)	V	6V	1 mV	$\pm(0.8\%+3\text{dig})$
		60V	10mV	
		600V	100mV	
		750V	1 V	
DC Current (A)	mA	6mA	0.001mA	$\pm(0.8\%+3\text{dig})$
		60mA	0.01mA	
		600mA	0.1mA	
	A	20.00A	10mA	
AC Current (A)	mA	60mA	0.01mA	$\pm(1.0\%+10\text{dig})$
		600mA	0.1mA	
		20.00A	10 mA	
Resistance (Ω)		600 Ω	0.1 Ω	$\pm(0.8\%+3\text{dig})$
		6k Ω	1 Ω	
		60k Ω	10 Ω	
		600k Ω	100 Ω	
		60M Ω	1k Ω	
		600M Ω	10k Ω	
Capacitance (F)		6nF - 9,999nF	10pF	$\pm(4\%+30\text{dig})$
		10nF - 6mnF	0.1nF/1nF/10nF/100nF/1uF	
		6mF - 60mF	1uF	
Frequency		10Hz - 10KHz	0.001/0.01/0.1/1Hz	$\pm(0.1\%+3\text{dig})$
Temperature ($^{\circ}\text{C}/^{\circ}\text{F}$)		- 20 $^{\circ}\text{C}$ - 1000 $^{\circ}\text{C}$	1 $^{\circ}\text{C}$	$\pm(1.0\%+3\text{dig})$
		- 4 $^{\circ}\text{F}$ - 1832 $^{\circ}\text{F}$	1 $^{\circ}\text{F}$	
Display		5999		
Frequency Response		40Hz - 1kHz		
True RMS	✓	LCD Backlight	✓	
Diode Test	✓	Flashlight	✓	
Auto Power-off	✓	Input Protection	✓	
On-off Warning	✓	Safety Compliance	600V, CAT IV / 1000V, CAT III	
Low-battery Indicator	✓	NCV	✓	
Data Hold	✓	Dimension (W / H / D)	196 x 88.50 x 56 (mm)	
Battery	1 x 9V 6FF22 battery	Weight (without package)	0.31 kg	

Specifications subject to change without prior notice.


Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

Accessories

The accessories subject to final delivery.

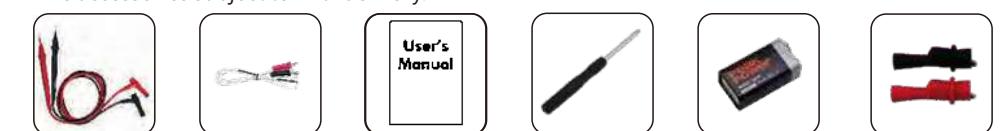

Multimeter
Leads

K-type
Thermocouple

Manual

Screwdriver

9V Battery
(optional)

Alligator Clip
(optional)

DM Series Bluetooth Digital Multimeter




CAT III
1000V



functioning as multimeter + datalogger

the measured data always updated, and auto- recorded to mobile device, saving labor to do on-site records; the recoding duration, and sampling duration could be customized, accessible in chart mode, facilitating comparison analysis between several multimeters

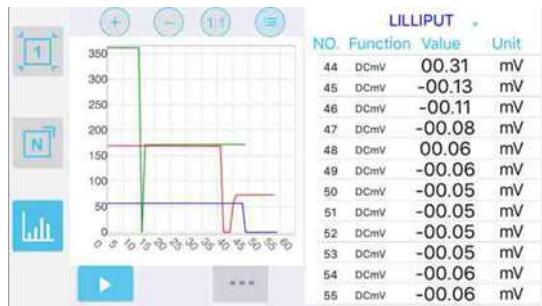


remote control supported

the function activated after TTS voice pack installed, which frees the eye-watch, making on-site measurement more comfortable



data- saving, recalling, and comparatively analyzing

CSV format data export supported, the history data could be recalled for comparison analysis; with the assistance of chart mode, the measured result more visualized, easier for decision- making

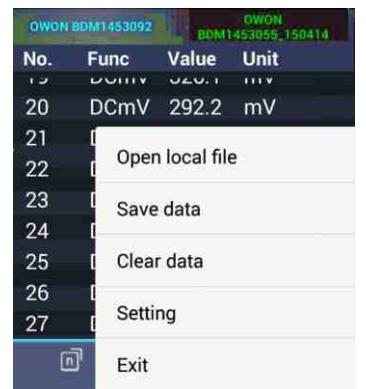

offline recording function - your process analyzer

B33+ / B35+ / B35T+ / B41T+ possible to record data into memory, but no need to leave mobile device on-site when data-processing, use mobile device to recall the saved data offline data-recording could continue for max 7 days (168 hours)



+ Performance Specifications

Model	D33	B33	B33+
		Measurement Range	
DC Voltage	V	400.0mV / 4.000V / 40.00V / 400.0V 1000V	0.1mV 1V
AC Voltage	V	4.000V / 40.00V 400.0V / 750V	1mV 0.1V
DC Current	µA	400.0µA / 4000µA	0.1µA ±(0.8%+2-digit)
	mA	40.00mA / 400.0mA	0.01mA ±(0.8%+2-digit)
	A	4.000A / 10.00A	1mA ±(1.2%+3-digit)
AC Current	µA	400.0µA / 4000µA	0.1µA ±(1%+3-digit)
	mA	40.00mA / 400.0mA	0.01mA ±(0.8%+2-digit)
	A	4.000A / 10.00A	1mA ±(2%+3-digit)
Resistance		400.0Ω / 4.000kΩ / 40.00kΩ / 400.0MΩ 40.0MΩ	0.1Ω 0.01MΩ
Capacitance		40.0nF / 400.0nF / 4.000µF / 40.00µF 100.0µF	0.01nF 0.1µF
Frequency		4.999Hz / 49.99Hz / 499.9Hz / 4.999kHz / 49.99kHz / 499.9kHz / 4.999MHz	1mHz ±(0.8%+2-digit)
Duty Ratio		0.1% - 99.9% (typical value: Vrms = 1V, f = 1kHz) 0.1% - 99.9% ($\geq 1\text{kHz}$)	0.1% ±(1.2%+3-digit) ±(2.5%+3-digit)
Temperature		-50°C - 400°C	1°C ±(2.5%+3-digit)
Display		3999 count	
Frequency Response		40Hz - 400Hz	
Shift Rate		3 times / s	

Auto Ranging	✓	Bluetooth Module	available in B33, and B33+
Offline Recording Function	available in B33+	LCD Backlight	✓
Record Period	168 hours (7 days)	Input Protection	✓
Record Length	10,000 points	Input Impedance	$\geq 10\text{M}\Omega$
Diode Test	✓	LCD Size	69mm x 52mm
Auto Power-off	✓	Display Area	67 x 46 mm (effective area 66 x 45 mm)
On-off Warning	✓	Battery	3V (1.5V x 2)
Low-battery Indicator	✓	Dimension (W x H x D)	85 x 185 x 30 (mm)
Data Hold	✓	Device Weight	0.32 kg
Relative Measurement	✓		

Specifications subject to change without prior notice.

Model	D35	D35T	B35	B35T	B35+	B35T+		
Measurement Range								
DC Voltage	mV	60.00mV / 600.0mV		0.01mV	±(0.5%+2-digit)			
	V	60.00mV / 600.0mV / 6.000V / 60.00V		0.1mV				
		600.0V / 1000V		0.1V				
AC Voltage	mV	60.00mV / 600.0mV		0.01mV	±(0.8%+2-digit)			
	V	60.00mV / 600.0mV / 6.000V / 60.00V		1mV	±(0.8%+2-digit)			
		600.0V / 750V		0.1V	±(1%+3-digit)			
DC Current	μA	600.0μA		0.1μA	±(0.8%+2-digit)			
	mA	600.0μA / 6.000mA / 60.00mA / 600.0mA / 6.000A		0.01mA	±(0.8%+2-digit)			
	A	20.00A		1mA	±(1.2%+3-digit)			
AC Current	μA	600.0μA		0.1μA	±(1%+3-digit)			
	mA	600.0μA / 6.000mA / 60.00mA / 600.0mA / 6.000A		0.01mA	±(0.8%+2-digit)			
	A	20.00A		1mA	±(2%+3-digit)			
Resistance		600.0Ω / 6.000kΩ / 60.00kΩ / 600.0kΩ / 6.000MΩ / 10.00MΩ		0.1Ω	±(0.8%+2-digit)			
		60.00MΩ		0.01MΩ	±(2%+3-digit)			
Capacitance		40.00nF		0.01nF	±(2.5%+3-digit)			
		400.0nF / 4.000μF / 40.00μF		0.1nF	±(2.5%+3-digit)			
		400.0μF / 4000μF		0.1μF	±(3%+5-digit)			
Frequency		9.999Hz / 99.99Hz / 999.9Hz / 9.999kHz / 99.99kHz / 999.9kHz / 9.999MHz		1mHz	±(0.8%+2-digit)			
Duty Ratio		0.1% - 99.9% (typical value: Vrms = 1V, f = 1kHz)		0.1%	±(1.2%+3-digit)			
		0.1% - 99.9% ($\geq 1\text{kHz}$)			±(2.5%+2-digit)			
Temperature		(-50°C) - (+400°C)		1°C	±(2.5%+3-digit)			
		(-58°F) - (+752°F)		1°F	±(4.5%+5-digit)			
Display	6000 count							
Frequency Response	(40-400)Hz (B35 / B35+ / D35); (40-1000)Hz (B35T / B35T+ / D35T)							
Shift Rate	3 times / s							
Simulated Chart Shift Rate	30 times / s							

Auto Ranging	√	Max / Min Value	√
Offline Recording Function	available in B35+, and B35T+	Bluetooth Module	available in B35, B35+, B35T, and B35T+
Record Period	168 hours (7 days)		
Record Length	10,000 points	LCD Backlight	√
True RMS	available in D35T, B35T, and B35T+	Simulated Chart	√
Diode Test	√	Input Protection	√
Audion Test	√	Input Impedance	10MΩ
Auto Power-off	√	LCD Size	69mm x 52mm
On-off Warning	√	Display Area	67 x 46 mm (effective area 66 x 45 mm)
Low-battery Indicator	√	Battery	3V (1.5V x 2)
Data Hold	√	Dimension (W x H x D)	85 x 185 x 30 (mm)
Relative Measurement	√	Device Weight	0.32 kg

Specifications subject to change without prior notice.

Model	B41T+			
DC Voltage	mV	220mV	0.01mV	±(0.05%+5-digit)
		2.2V	0.1mV	
	V	22V	1mV	±(0.01%+2-digit)
		220V	10mV	
		1000V	0.1V	±(0.1%+5-digit)
AC Voltage	mV	220mV	0.01mV	≤1kHz ±(1.0%+10-digit)
		2.2V	0.1mV	>1kHz ±(1.5%+50-digit)
	V	22V	1mV	≤1kHz ±(0.8%+25-digit)
		220V	10mV	>1kHz ±(1.2%+50-digit)
		750V	0.1V	≤1kHz ±(1.2%+50-digit)
DC Current	μA	220μA	0.01μA	±(0.5%+10-digit)
		2200μA	0.1μA	
	mA	22mA	1μA	
		220mA	10μA	±(0.8%+10-digit)
	A	20.00A	1mA	±(2%+25-digit)
AC Current	μA	220μA	0.01μA	≤1kHz ±(0.8%+10-digit)
		2200μA	0.1μA	>1kHz ±(1.2%+25-digit)
	mA	22mA	1μA	≤1kHz ±(0.8%+10-digit)
		220mA	10μA	>1kHz ±(1.5%+50-digit)
	A	20.00A	1mA	≤1kHz ±(1.5%+10-digit)
Resistance		220Ω	0.01MΩ	±(0.5%+30-digit)
		2.2kΩ	0.1Ω	±(0.5%+10-digit)
		22kΩ	1Ω	
		220kΩ	10Ω	
		2.2MΩ	100Ω	±(0.8%+10-digit)
Capacitance		22MΩ	1kΩ	±(1.5%+10-digit)
		220MΩ	10kΩ	±(5%+10-digit)
		22nF	1pF	
		220nF	10pF	
		2.2μF	100pF	±(3%+5-digit)
Frequency		22μF	1nF	
		220μF	10nF	
		2.2mF	100nF	±(4.0%+10-digit)
		>220mF	/	/
		22.00Hz	0.01Hz	
		220.0Hz	0.1Hz	
		22.000kHz	1Hz	
		220.00kHz	10Hz	±(0.1%+4-digit)
		22.00Hz	100Hz	
		2.2000MHz	1kHz	
		22.00MHz	10kHz	
		>220MHz	/	/

Duty Ratio	5.0% - 94.9% (typical value: Vrms=1V, f=1kHz)	0.1%	±(1.2%+3-digit)
	0.1% - 99.9% ($\geq 1\text{kHz}$)		±(2.5%+3-digit)
Temperature	-50°C - 400°C	0.1°C	±(1.0%+5-digit)
	-58 °F - 752 °F	0.1°F	±(1.2%+6-digit)
Display	21999 count		
Frequency Response	40Hz - 10000Hz		
Shift Rate	3 times / s		

Auto Ranging	√	Max / Min Value	√
Offline Recording Function	√	Bluetooth Module	√
Record Period	168 hours (7 days)	LCD Backlight	√
Record Length	10,000 points	Simulated Chart	√
True RMS	√	Input Protection	√
Diode Test	√	Input Impedance	10MΩ
Audion Test	√	LCD Size	69mm x 52mm
Auto Power-off	√	Display Area	67 x 46 mm (effective area 66 x 45 mm)
On-off Warning	√	Battery	3V (1.5V x 2)
Low-battery Indicator	√	Dimension (W x H x D)	85 x 185 x 30 (mm)
Data Hold	√	Device Weight	0.32 kg

Specifications subject to change without prior notice.

Application

electronic circuit debugging
education and training

circuit testing
automobile maintenance and testing

design and manufacture
automobile maintenance and testing

Accessories

The accessories subject to final delivery.



Multimeter Lead



K-type Thermocouple



Manual



BT2.0

mobile app accessible via
scanning QR code



BLE4.0

mobile app accessible via
scanning QR code

optional accessories:



Alligator Clip



Multi-function
Test Bench
(excl. D33 / B33 / B33+)



Soft Bag

Differential Probe



Model	OD5140	OD5070	OD5015
Bandwidth (-3dB)	100MHz	50MHz	DC-100MHz (-3dB)
Attenuation Ratio	1:1000; 1:100		
Accuracy	±1%		
Impedance	10MΩ//2PF		4MΩ//2PF
Output Voltage (into 50kΩ load)	7V		
Offset	< ±5mV		
Impedance	50Ω		
CMRR	-80dB@60Hz,-50dB@100KHz		
Input differentialVp-p	14KV@1/1000 1.4KV@1/100	7000V@1/1000 700V@1/100	1500V@1/1000 150V@1/100
Power Requirements (Options)	6V DC/300mA mains adaptor		
Length of BNC Cable	90cm		
Length of Input Leads	60cm		
Device Weight	500g		
Dimension	186 x 84 x 38 (mm)		165x69x26mm

Specifications subject to change without prior notice.

High Voltage Probe



Model	OH5040	OH5018	Model	OH5007
Max.Working Voltage	DC+AC (peak) 40KV CATII AC (rms): 27KV CATII	DC+AC (peak) 18KV CATII AC (rms): 12KV CATII	Max.Working Voltage	DC: 0-10KV AC(rms): 0 ~ 7KV; 峰峰值: 0 ~ 20KV(Pulse)
The pulse	<27K Vp-p	<12K Vp-p	Bandwidth(-3dB)	50MHz
Max.Loading Current	43μA	90μA	noise	>60dB(1KHz),>50dB(1MHz)
Bandwidth (- noise)	50MHz	100MHz	AttenuationRatio	1: 1000
Attenuation	1000: 1		Accuracy	DC:±3% (DC to 10KV) AC:±3%(1KHz/1KV/1KHz RMS) -3dB:0~40MHz
Accuracy	DC:≤3%; AC:≤3%(1KHz)		Impedance	100MΩ±5%
Impedance	900MΩ	200MΩ	Input Capacitance	3.0PF±0.5PF
Input Capacitor	2PF	1.5PF	Cable Length	2m±0.2m
Cable Length	2m±0.2m		Temperature Coefficient	≤200PPM/°C
Temp.	≤200PPM/°C		Operation Temp	0 ~ +50°C
Operation Temp	-10 ~ 55°C		Dimension	340mm(长)x80Φ(圆柱形)
Dimension	80 x 80 x 320 (mm)		Device Weight	250g
Device Weight	460g			

Specifications subject to change without prior notice.

Current Probe



Model		CP-05+					
Test Range		1mA - 400A					
Resolution		1mA					
Bandwidth		DC - 200KHz ($\pm 3\text{dB}$)					
Jaw Size		23mm (max)					
Auto Zero at Power-on		√					
Power Supply		9V 6F22 Battery					
Operating Temperature		0°C to 50°C					
Operating Humidity		15% to 70% RH					
AC Current	Range	AC 4A	AC 40A	AC 200A	AC 200A - 400A		
	Accuracy	$\pm 2.0\%\text{rdg}\pm 5\text{-digit}$			$\pm 3.0\%\text{rdg}\pm 5\text{-digit}$		
	Sensitivity	1mV/10mA	1mV/0.1A	1mV/1A			
DC Current	Range	DC 4A	DC 40A	DC 200A	DC 200 - 400A		
	Accuracy	$\pm 1.5\%\text{rdg}\pm 5\text{-digit}$			$\pm 3.0\%\text{rdg}\pm 5\text{-digit}$		
	Sensitivity	1mV/10mA	1mV/0.1A	1mV/1A			
Dimension (W x H x D)		180 x 30 x 44 (mm)					
Device Weight		about 200g					

Specifications subject to change without prior notice.



Model		C5010
Measuring Range		0.05A-10A 1A-100A
Voltage		1V Peak
Conversion Ratio		100mA/V 10mA/V
Bandwidth		100KHz
Diameter mouth diameter		11.8mm
Operating temperature		0°C - 50°C
Battery		9V alkaline battery
Accuracy		2%
Dimension		231x67x36 (mm), 2m Cable length
Device Weight		about 330g (Containing batteries)

Specifications subject to change without prior notice.

Accessories

The accessories subject to final delivery.



Soft Bag



Model		CP-07+	
Test Range		400mA - 4A	
Resolution		0.1mA	
Bandwidth		DC - 1MHz ($\pm 3\text{dB}$)	
Jaw Size		5mm (max)	
Auto Zero at Power-on		√	
Power Supply		9V 6F22 Battery	
Operating Temperature		0°C to 50°C	
Operating Humidity		15% to 70% RH	
DC Current	Range	DCA 400mA	DCA 4A
	Accuracy	$\pm 1.5\%\text{rdg}\pm 5\text{-digit}$	
	Sensitivity	1mV/1mA	1mV/10mA
AC Current	Range	ACA 400mA	ACA 4A
	Accuracy	$\pm 2.0\%\text{rdg}\pm 5\text{-digit}$	
	Sensitivity	1mV/1mA	1mV/10mA
Dimension (W x H x D)		215 x 36 x 58 (mm)	
Device Weight		about 200g	

Specifications subject to change without prior notice.

Accessories

The accessories subject to final delivery.



BNC cable



Extension cord



Soft Bag

Oscilloscope Probe Specification



Model	T5100	T5200
Attenuation Ratio	1X or 10X	1X or 10X
Bandwidth	100MHz	200MHz
Input R	1MΩ or 10MΩ	1MΩ or 10MΩ
Input C	1X: 85pF -115pF 10X: 14.5pF -17.5pF	1X: 85pF -115pF 10X: 14.5pF -17.5pF
Max Input Voltage	1X: <200V 10X: <600V	1X: <200V 10X: <600V



Model	P7300
Attenuation Ratio	1X or 10X
Bandwidth	6MHz / 300MHz
Input R	1MΩ or 10MΩ
Input C	1X: 85pF -120pF 10X: 18.5pF -22.5pF
Max Input Voltage	1X: <300V 10X: <600V



Model	P2060
Attenuation Ratio	1X or 10X
Bandwidth	60MHz
Input R	1MΩ or 10MΩ
Input C	1X: 70pF -120pF 10X: 14pF -18pF
Max Input Voltage	1X: <200V 10X: <600V



Model	T3060	T3100
Attenuation Ratio	100X	100X
Bandwidth	60MHz	100MHz
Input R	100MΩ	100MΩ
Input C	18.5pF - 22.5pF	18.5pF - 22.5pF
Max Input Voltage	<2KV	<2KV



Model	TH3100A
Attenuation Ratio	100X
Bandwidth	100MHz
Input R	100MΩ
Input C	3.5pF - 10.5pF
Max Input Voltage	<5KV



Model	P4060	P4100	P4250
Attenuation Ratio	100X	100X	100X
Bandwidth	60MHz	100MHz	250MHz
Input R	100MΩ	250MHz	250MHz
Input C	5pF	5pF	5pF
Max Input Voltage	<2KV	<2KV	<2KV



Model	OW3060	OW3100	OW3200	OW3300
Attenuation Ratio	1X or 10X	1X or 10X	1X or 10X	1X or 10X
Bandwidth	6MHz/60MHz	6MHz/100MHz	6MHz/200MHz	6MHz/300MHz
Input R	1MΩ or 10MΩ	1MΩ or 10MΩ	1MΩ or 10MΩ	1MΩ or 10MΩ
Input C	1X: 85pF -115pF 10X: 14.5pF -17.5pF			
Max Input Voltage	1X: <200V 10X: <600V	1X: <200V 10X: <600V	1X: <200V 10X: <600V	1X: <200V 10X: <600V

